



Approximately 42" x 42"

Quilt designed by Donna Russell

Please read through all of the instructions before you begin your project.

Fabric Requirements:

- Pattern #25464-Mul11 panel
- Pattern #25465-Gre11 ¼ yards
- Pattern #25467-Jad1 (backing).....1 ¼ yards
- Pattern #25468-Sag1½ yard
- Pattern #25469-Gry1¾ yard
- Pattern #25370-Gre1⅝ yard
- Batting.....1 piece 44" x 44"

Cutting Instructions:

Please read all instructions carefully before beginning. All seams are a scant ¼" which is included in all measurements unless otherwise stated. Cut pieces in order listed. Label all pieces. Refer to all illustrations and the quilt image for proper cutting and assembly.
 * wof = width of fabric, lof =length of fabric.

Lake Panel (25464-Mul1)

1. Fussy cut panel to 20 ½" x 20 ½"
Label: **A**.

Fish All-over Patch (25465-Mul1)

1. Cut (2) vertical strips 42" x 5 ½". Label: **I**.
2. Cut (2) strips 5 ½" x 32". Label: **H**

Water (#25467-Jad1)

1. Cut off the selvages. Piece will be used as is for the backing.

Fish Lures, sage (#25468-Sag1)

1. Cut (2) strips 4" x 20 ½" and label: **B**.
2. Cut (2) strips 4" x 27 ½" and label: **C**.

River Rocks (#25469-Gry1)

1. Cut (2) strips 2" x 29". Label: **F**.
2. Cut (2) strips 2" x 32". Label: **G**.

Texture, green (25470-Gre1)

1. Cut (5) strips 2 ½" x wof for the binding.
2. Cut (2) strips 1 ¼" x 27 ½". Label: **D**.
3. Cut (2) strips 1 ¼" x 29". Label: **E**.

Quilt Assembly:

Refer to the quilt image as well as the layout illustration below to properly arrange and align all of the pieces.

1. Sew one "B" to each side edge of "A" (center panel).
2. Sew one "C" to the top edge and one to the bottom edge of "A".
3. Sew one "D" to each side edge of the quilt top.


4. Sew one "E" to the top edge and one to the bottom edge of the quilt top.
5. Sew one "F" to each side edge of the quilt top.
6. Sew one "G" to the top edge and one to the bottom edge of the quilt top.
7. Being mindful of the direction of the fabric, sew one "H" to the top edge and one to the bottom edge of the quilt top.
8. Again, being mindful of the direction of the fabric, sew one "I" to each side edge of the quilt top.

Finishing:

1. Layer the quilt top with the batting and backing and quilt as desired.
2. Trim the backing and batting even with the quilt top.
3. Sew the binding strips end to end with a diagonal seam to form one long strip.
4. Press the strip in half, lengthwise, wrong sides together.
5. Match the raw edges of the binding with the edge the quilt top, and sew with a ¼" seam allowance, mitering the corners.
6. Turn the binding to the back and stitch in place.

Enjoy your quilt!

QUILT LAYOUT

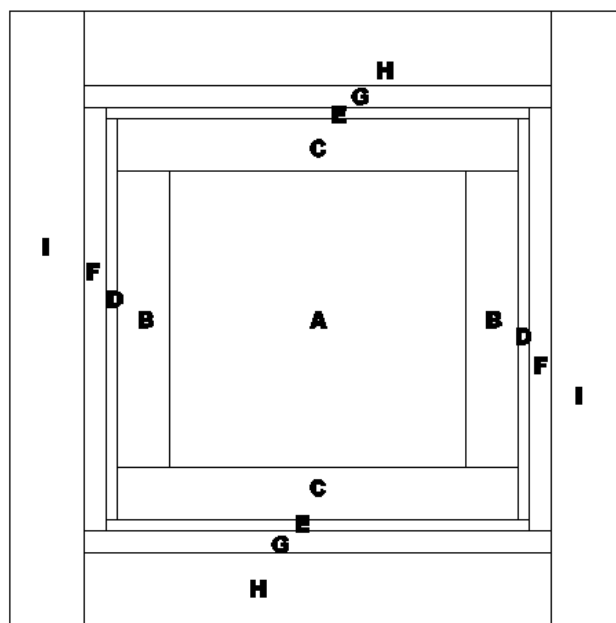

**Disclaimer: Please note that the instructions for this quilt are written for the specified fabric line from SPX Fabrics. If substitutions of fabric other than those stated in the instructions are used, the pattern may not yield the desired results, and the actual yardages may vary.*