



Disney
**Winnie
the Pooh**

Simple Stripes Baby Blanket (Q-023)



Exclusive Quilt Design by Made by Marion for Camelot Fabrics
Fabric collection: Winnie the Pooh designs by Camelot Design Studio from Camelot Fabrics.
© Disney. Based on the "Winnie the Pooh" works by A.A. Milne and E.H. Shepard.
The direction of the fabrics in the digital imagery may not be accurate to the final product.



Blog, Facebook, Twitter @CamelotFabrics
Pinterest, YouTube & Instagram @Camelot_Fabrics
camelotfabrics.com • camelotfabricsblog.com
Toll-Free: 1-800-361-4120 • 514-382-2400
info@camelotfabrics.com • www.camelotfabrics.com

Fabric requirements



Fabric A: 85430104 #1
1-1/3 yards



Fabric B: 2142-0001
1/8 yard



Fabric C: 85430103 #3
1/8 yard



Fabric D: 85430105 #3
1/8 yard



Fabric E: 85430102 #3
1/8 yard



Fabric F: 85430101 #3
1/8 yard



Fabric G: 85430105 #1
1/8 yard



Fabric H: 85430102 #1
1/8 yard



Fabric I: 85430101 #1
1/8 yard



Fabric J: 85430104 #3
1/8 yard



Fabric K: 2144-0042
1/8 yard



Fabric L (Backing)
85430101 #3
1-1/2 yard

Finished quilt size: 45" x 45"

OTHER TOOLS & SUPPLIES

- 1-1/2 yards quilt batting (58" wide)
- sewing machine
- needle & coordinating thread
- iron & pressing surface
- scissors & fabric shears
- straight pins
- fabric marker
- measuring tape & straight-edge ruler

NOTES

1. Please wash, dry & iron your fabric before beginning, and trim the selvages.
2. Unless otherwise indicated, use a 1/4" seam allowance throughout.
3. Unless otherwise indicated, all seams are sewn with the fabrics' Right Sides together.
4. WOF = Width of Fabric.

CUTTING

Fabric A • Borders

Cut (8) strips 4-1/2" wide x 1-1/3 yds tall.

Fabrics B-K • Bars

Trim to accurate 4-1/2" x WOF strips.

Fabric B Fabric C Fabric D Fabric E Fabric F Fabric G Fabric H Fabric I Fabric J Fabric K


Fabric L • Backing

Don't cut yet.


ASSEMBLY

1. Sew the Bars together top-to-bottom as shown, taking care that all directional prints are oriented in the same way. Press the seams toward the darker of each pair of fabrics.

This creates the blanket's Center Block.




Note - please refer to the project illustration on Page 1 for the order of fabrics.

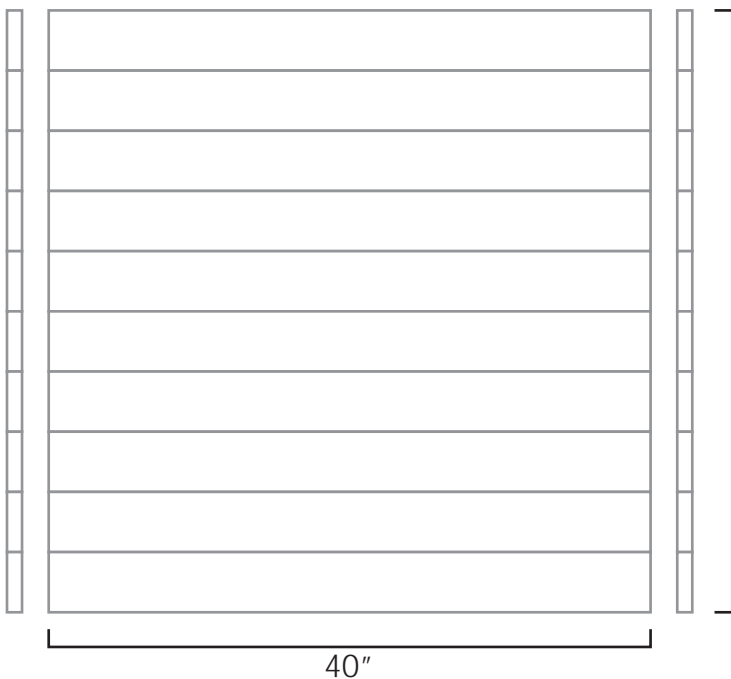


2. Measure the Center Block's height (top of Fabric B to bottom of Fabric K). It should be 40" tall, but yours may be a little tall or shorter. Trim any excess width so that the Center is a square.

3. Cut a square from your Fabric L (Backing) fabric, the same size as the Center Block.




4. Sew (1) Fabric A strip to the top of the Center Block, and (1) to the bottom. Trim these strips to match the width of the Center and press the seams toward the Center Block.

5. Sew Fabric A strips to the top & bottom of the Backing square, trim them, and press the seams toward the Backing, just as you did with the Center Block in Step 4.

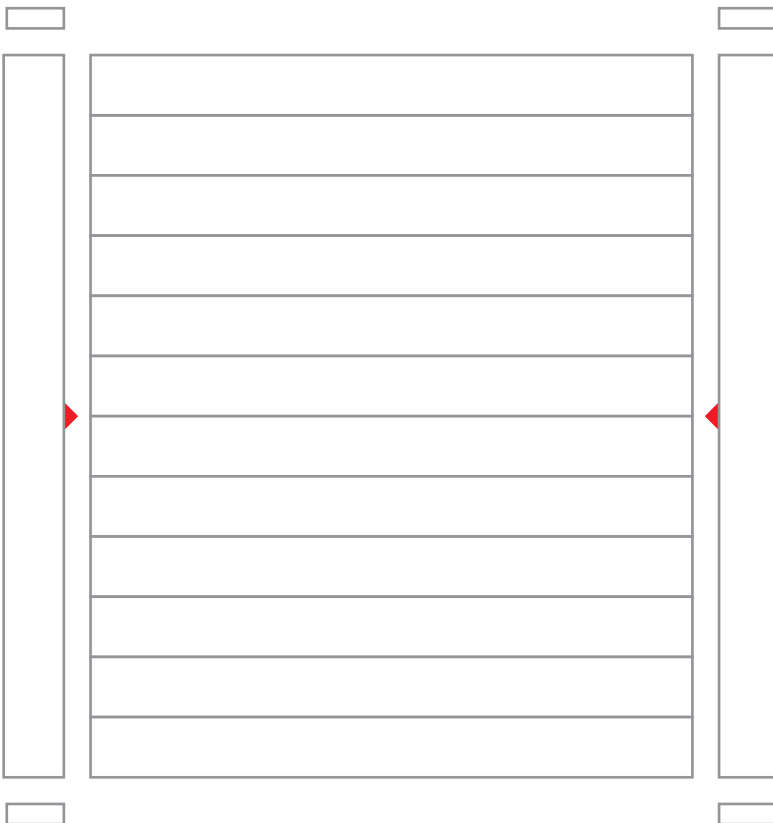

6. Sew Fabric A strips to the left- & right-hand sides of the Center Block, trim any excess height, and press the seams away from the Center.


7. Repeat Step 6 with the Backing, but press the seams open.

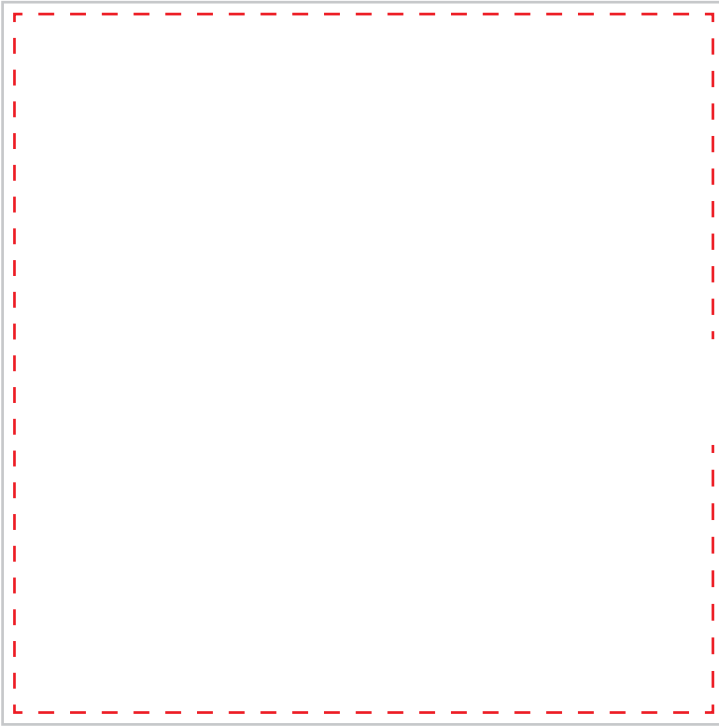

8. Lay out your batting on the floor or another large surface and place the (2) faces of your blanket on top of it, Right Sides together.

Check that all edges of the blanket's faces are aligned and pin the (3) layers together around all (4) sides. Trim any excess batting.

9. Sew all layers together around all (4) edges with a 1/2" seam allowance, but leave a 6" gap in one side for turning.

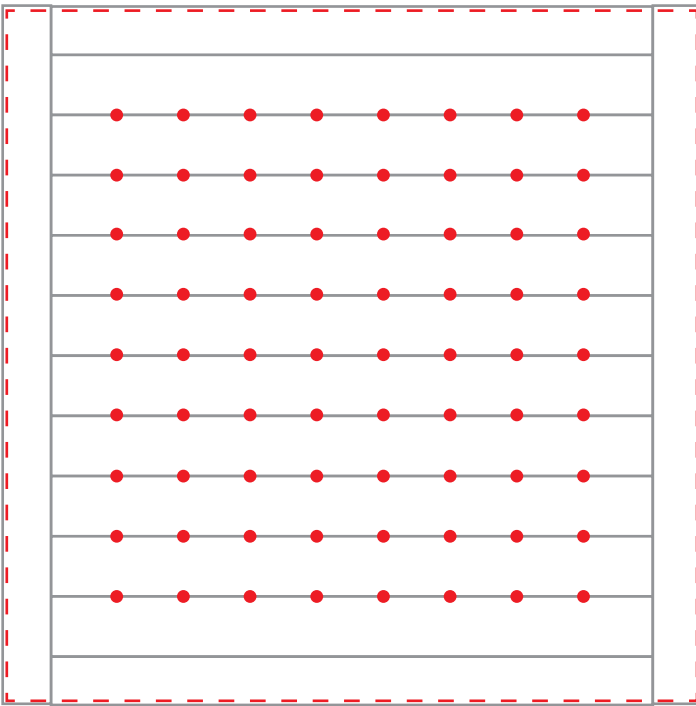

10. Clip your corners and turn the blanket Right Side out. Poke the corners all the way out with a knitting needle or the end of a pencil.

11. Topstitch around the edges of your blanket, including the gap from Step 9, with a 1/16" seam allowance.

12. Pin through all layers of the blanket at 4" intervals along each Center Block seam, as shown by the red dots.

13. At each pin, tack a short line of stitches through all layers of your blanket, sewing directly over the existing seam line (stitching "in the ditch"). Backstitch to lock these little seams in place. When finished, the seams should be almost invisible.

Tip: instead of cutting your thread after each tack, simply lift your machine's foot and maneuver the point of the next line of stitches into place. Just make sure to trim the threads between all those tacks when you're finished!