

BASIC Stockings



Prints as shown may not
be to exact scale.

A
2 Stockings + Hanging Loops
1 1/8 yards*

B
2 Cuffs + Linings for 2 Stockings
1 1/2 yards

*Extra may be needed for fussy-cutting



Wilmington Prints: A World of Possibilities


www.wilmingtonprints.com

BASIC Stockings

Please read all instructions carefully AND identify all fabrics before beginning.
All instructions include a 1/4" seam allowance

1. Template:

1. Trace the 3 template pieces on pages 2 and 3 onto a 12" x 18" sheet of template plastic or pattern paper to form a stocking shape as shown (approximately 11-1/4" x 16-1/4").



2. Cut out the traced template along outside lines (Note: Inner line is stitching line with 1/4" seam allowance).

2. Cut the following for two stockings:

Fabric B - Cut (1) 11-1/2" strip, subcut (2) 11-1/2" x 14" rectangles for cuffs


Fabrics A and B - From each fabric, cut 2 stocking pieces and 2 reverse stocking pieces as shown, depending on direction of print.

Fabric A - Cut (2) 1" x 6" pieces for loops



3. Sewing Order:

1. Fold **Fabric B** 11-1/2" x 14" piece in half right sides together, matching the 11-1/2" edges. Stitch along length as shown. Press seam open.




Letters in italics indicate wrong side of fabric.

2. Fold sewn **Fabric B** tube in half wrong sides together, matching raw edges as shown to form cuff. Baste around raw edges.



3. Place **Fabric A** stocking and reverse stocking pieces right sides together. Stitch along sides and bottom, leaving top edge open. Clip curves. Turn right side out.




4. In the same manner, sew **Fabric B** stocking and reverse stocking pieces for lining, but do NOT turn right side out.

5. Slide **Fabric B** lining inside **Fabric A** stocking, wrong sides together. Align top edges. Baste layers together along the top edge.




6. Press **Fabric A** 1" x 6" strip in half lengthwise. Open and press each long edge to center then refold in half. Top stitch lengthwise to create hanging tab (1/4" x 6" unfinished).



7. Fold hanging tab in half so it is 3" long. Place folded end into the stocking/lining at back seam matching raw edges. Baste in place.



8. Slide cuff, folded side down, into top of stocking/lining. Pin layers together matching raw edges, easing cuff to fit. Sew layers together, then overcast raw edges to prevent fraying.




9. Turn cuff out and over stocking, leaving 1/2" of cuff above top of seam. Pull out hanging loop to finish.

10. Repeat to make second stocking. Hang stockings and enjoy!!




BASIC Stockings

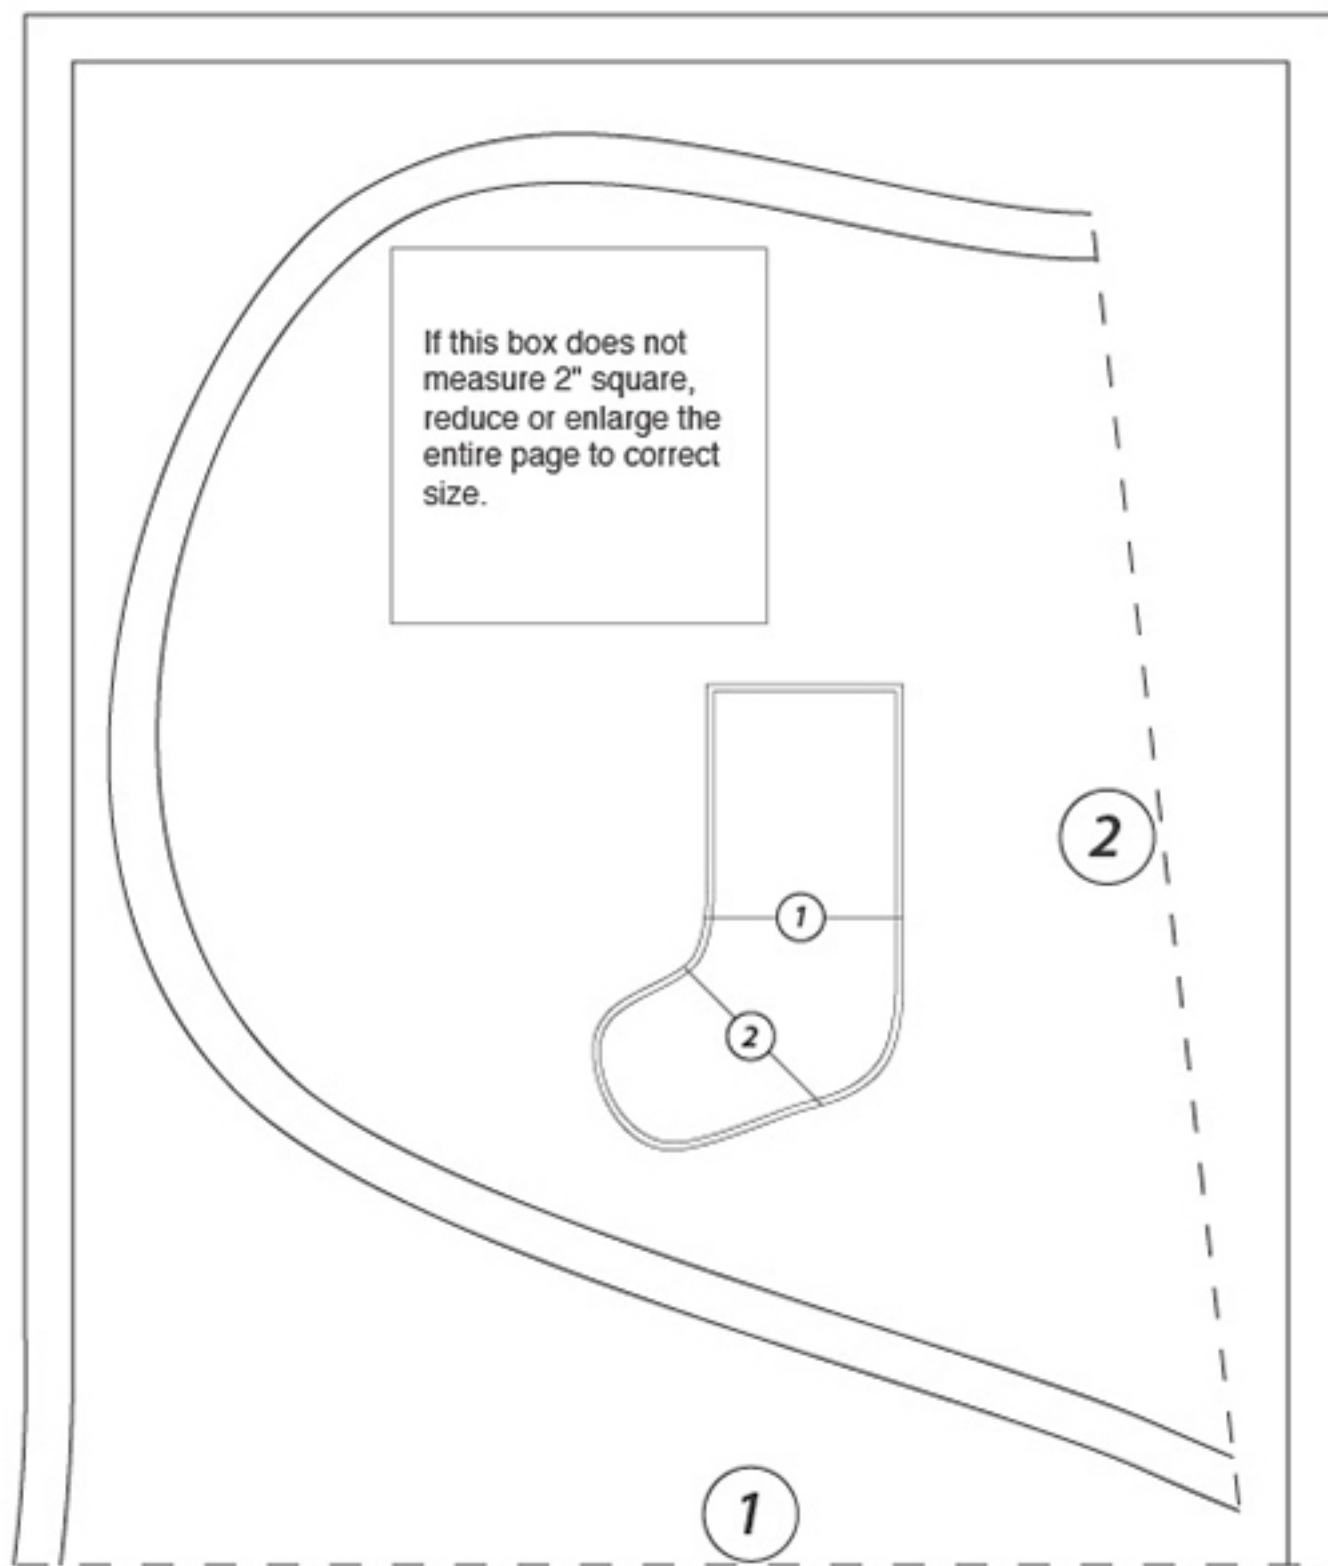

BASIC Stockings

If this box does not measure 2" square, reduce or enlarge the entire page to correct size.

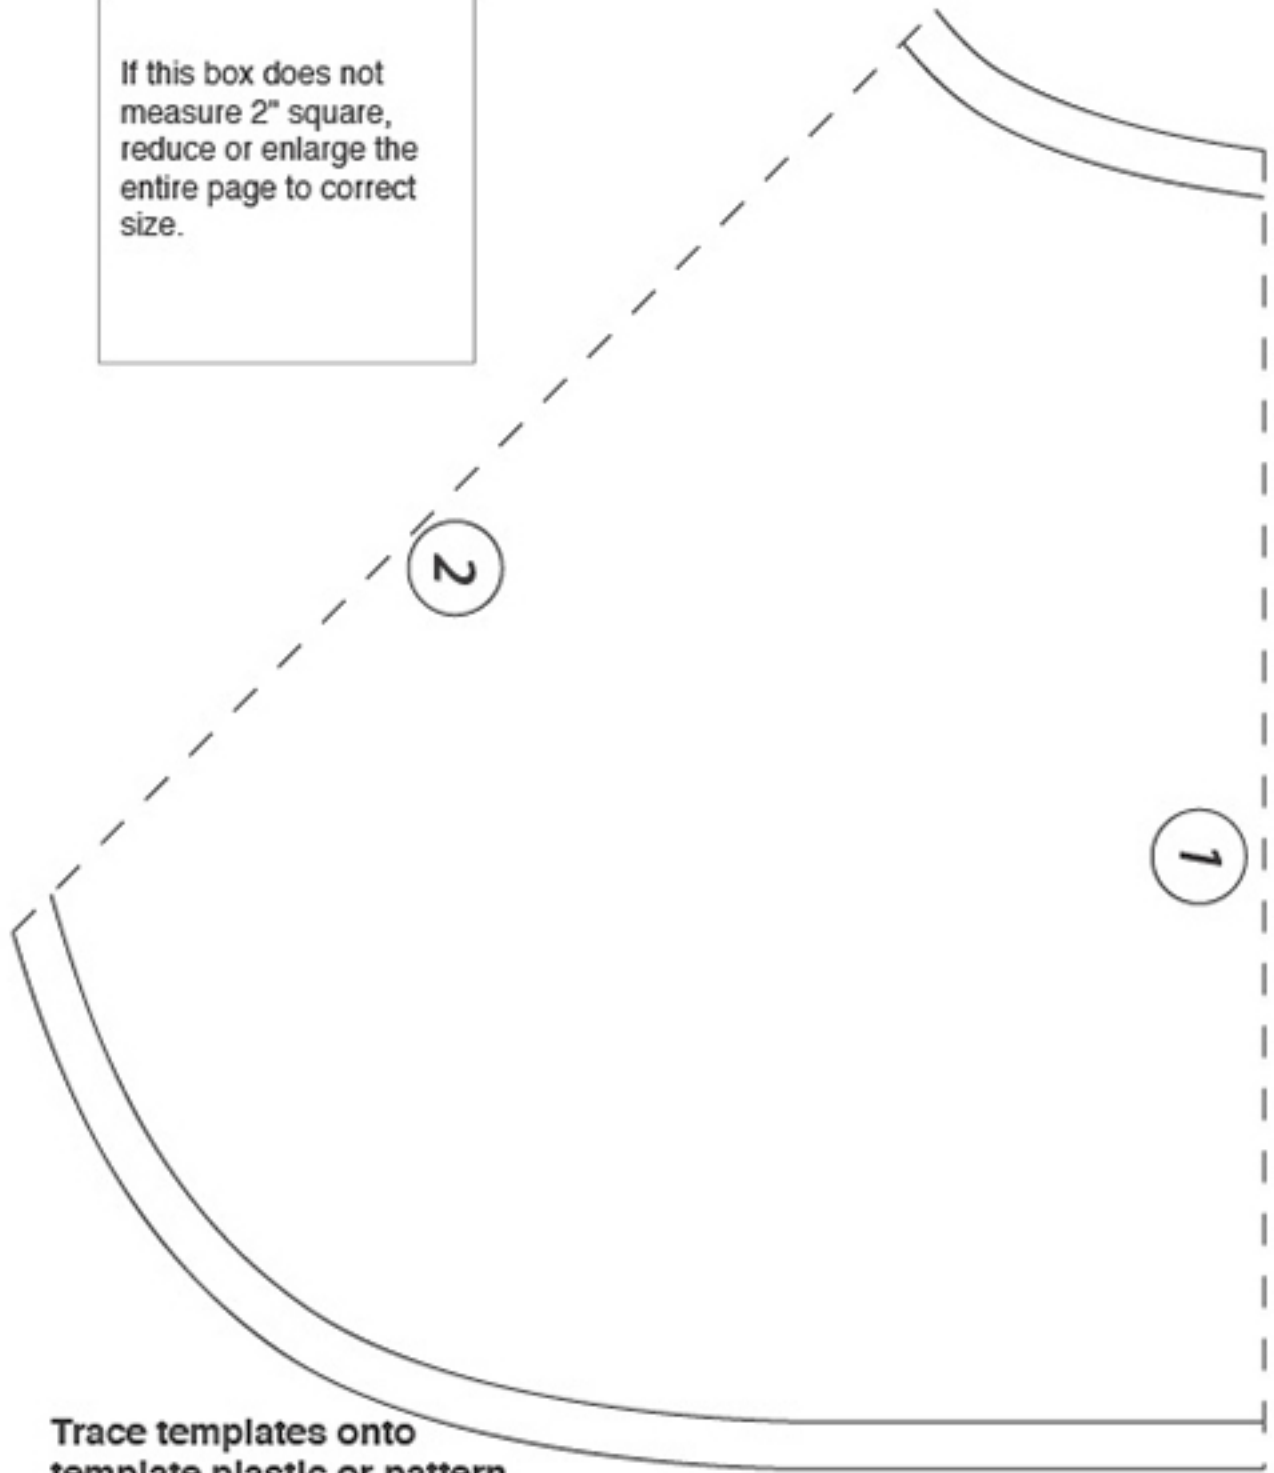

Trace templates onto template plastic or pattern paper. Match dashed lines as indicated to form stocking shape.