

SIZE 56" x 68"



Designed by: Caroline Fairbanks-Critchfield

*SewCANShe.com*





Finished Size: 56" x 68"

**FABRIC REQUIREMENTS**

	<p><b>Fabric A</b> STRIPS SWTCAR K</p> <p>3 ROLLS</p> <p>6 UNITS/36 ROLLS</p>		<p><b>Fabric B</b> STRIPS SWTCAR P</p> <p>1 ROLL</p> <p>2 UNITS/12 ROLLS</p>		<p><b>Fabric C</b> STRIPS SWTCAR B</p> <p>1 ROLL</p> <p>2 UNITS/12 ROLLS</p>		<p>26994 N</p> <p>1/2 YARD*</p> <p>1 BOLT</p>
	<p>26987 C</p> <p>4 YARDS**</p> <p>4 BOLTS</p>	<p>* Binding only ** Backing only</p>					

\* Numbers within gray box = Number of Bolts needed to make 12 Kits

We recommend that you carefully read through all instructions before getting started on your project.

## CUTTING DIRECTIONS

**WOF = Width of fabric from selvage to selvage**

### Fabric A

- Subcut (20) 2½" strips into (120) 6½" pieces.
- Subcut (14) 2½" strips into (120) 4½" pieces.

### Fabric B

- Select (10) 2½" strips. From each strip, subcut (6) 4½" pieces and (6) 2½" pieces for a total of (60) 4½" pieces and (60) 2½" pieces.

### Fabric C

- Select (10) 2½" strips. From each strip, subcut (6) 4½" pieces and (6) 2½" pieces for a total of (60) 4½" pieces and (60) 2½" pieces.

### Fabric D

- Cut (7) 2½" x WOF strips for binding.

### Fabric E

- Cut (2) 64" x WOF pieces for backing.

## CONSTRUCTING THE BLOCKS

Use a ¼" seam allowance throughout.  
Group all pieces by size and color family.  
Choose pieces from each color family at random.

1. Select (1) **Fabric A** 4½" piece and (1) **Fabric B** or **Fabric C** 4½" piece. Sew the 2 pieces together.




2. Repeat to make (60) **Fabric A/Fabric B** and (60) **Fabric A/Fabric C** units.

3. Select (1) **Fabric A** 6½" piece and (1) **Fabric B** or **Fabric C** 2½" piece. Sew the 2 pieces together.




4. Repeat to make (60) **Fabric A/Fabric B** and (60) **Fabric A/Fabric C** units.

5. Select (2) **Fabric A/Fabric B** units and 2 **Fabric A/Fabric C** as shown below. Sew the 4 units together to make a block.

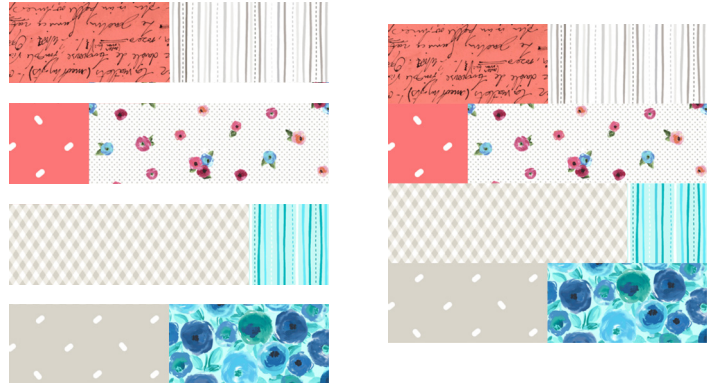

6. Repeat to make 60 blocks in the configuration shown above (**Fabric B** top left, **Fabric C** bottom right).

7. Select 11 blocks. Cut each block in half diagonally as shown below. Cut through the **Fabric A** only, making a "**Fabric B side**" and a "**Fabric C side**".

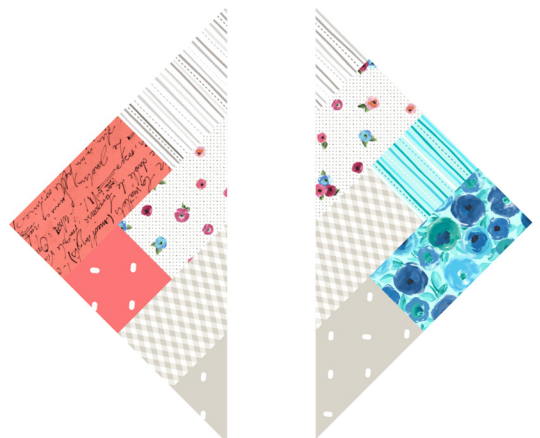



## QUILT ASSEMBLY

1. Arrange the square blocks as shown in the **Quilt Assembly Diagram**.
2. Place the triangle pieces along the edges.
3. Sew the blocks and triangle pieces together in diagonal rows. When sewing a triangle piece to a block, align the square corners and start sewing there. The triangles are a bit smaller than the blocks.
4. Sew the rows together to finish the quilt top. Trim the edges to square the quilt if necessary.

## FINISHING

1. Sew the 64" x WOF **Fabric E** pieces together along their WOF sides to make the backing
2. Layer backing, batting, and quilt top. Baste.
3. Quilt as desired.
4. Make double-fold binding using the 2½"-wide **Fabric D** strips. Bind to finish quilt.



Quilt Assembly Diagram

*While all possible care has been taken to ensure the accuracy of this pattern, we are not responsible for printing errors or the way in which individual work varies.*