

MAYWOOD  STUDIO

SWEATER WEATHER QUILT



Featuring the Sweater Weather Collection by Kris Lammers

51 1/2" x 66 1/2"

#madewithmaywood
maywoodstudio.com





Fat Quarter Friendly!



Fabric 1
10035-O



Fabric 2
10036-S




Fabric 3
10035-S



Fabric 4
10032-G



Fabric 5
10035-G



Fabric 6
10036-G



Fabric 7
10031-N



Fabric 8
10036-N



Fabric 9
10036-E




Fabric 10
10031-O

Fabric Requirements

Fabric 1	10035-O	Fat Quarter
Fabric 2	10036-S	Fat Quarter
Fabric 3	10035-S	Fat Quarter
Fabric 4	10032-G	Fat Quarter
Fabric 5	10035-G	Fat Quarter
Fabric 6	10036-G	Fat Quarter
Fabric 7	10031-N	Fat Quarter
Fabric 8	10036-N	Fat Quarter
Fabric 9	10036-E	2 yards
Fabric 10	10031-0	1/2 yard
Backing	your choice	3-1/2 yards

WOF - Width of Fabric
 LOF - Length of Fabric
 RST - Right Sides Together
 HST - Half Square Triangle



Block 6" x 6" finished

*note that E/C units are made with a two-at-a time HST method.

Cutting

Fabrics 1, 2, 3, 4, 5, 6, 7, 8

*Refer to the fat quarter cutting guide below

From each cut:

- A: Cut (3) 6" x 6-1/2" rectangles
- B: Cut (2) 3-1/4" x 6-1/2" rectangles
- C: Cut (8) 3-1/4" squares
- D: Cut (16) 2-1/2" squares

Fabric 9

Cut (6) 3-1/4" x WOF Strips. Subcut into:

E: (64) 3-1/4" squares

Cut (3) 2" x WOF Strips. Subcut into:

F: (64) 2" squares

*Use leftover from E for the remainder

Cut (2) 2-1/2" x WOF strips. Subcut into:

G: (32) 2-1/2" squares

Cut (15) 2-1/2" x WOF Strips

Sew (9) strips together, end to end.

Cut into (7) 2-1/2" x 46-1/2" sashing strips

Sew (6) strips together, end to end.


Cut (2) 2-1/2" x 62-1/2" side borders

Cut (2) 2-1/2" x 50-1/2" for the top and bottom borders

Fabric 10 - Binding

Cut (7) 2-1/2" x WOF Strips

Fat Quarter Cutting Guide: A,B,C,D

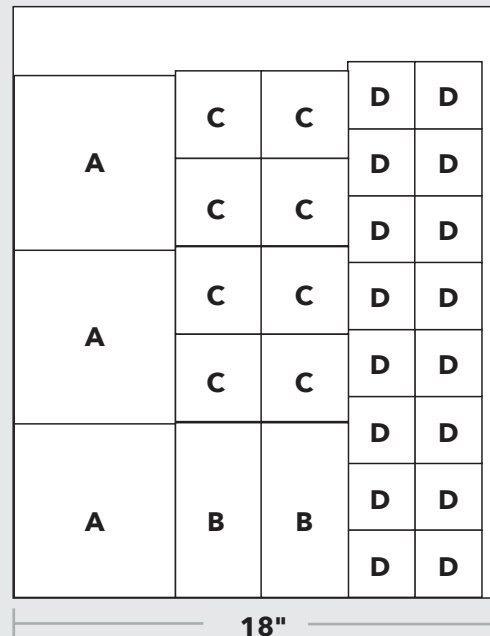


Sweater Weather Quilt – by Maywood Studio

Please read all instructions before you begin. Seam allowance is 1/4" unless otherwise stated. Use a light sizing/starch on the squares before cutting triangles to help control stretching along the bias edges. Press in the direction of arrows. Fabric is abbreviated to F, for example, F5-A is Fabric 5, piece A.

Make the 2-at-a-time HSTs (Half Square Triangles)


1. Draw a diagonal line from corner to corner on the F9-E square. Place the E square, RST, over a F1-C square. Sew 1/4" away on either side of the marked line.

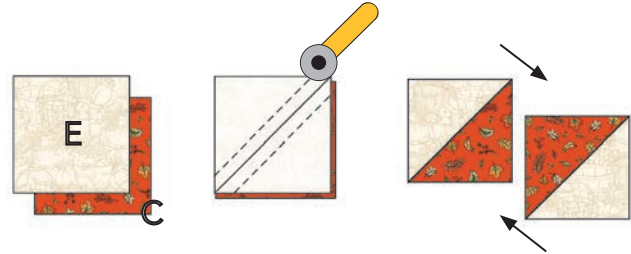

2. Cut on the marked line. Press toward C. Trim to 2-1/2" square. Repeat and make 8 for a total of 16 HST units.

Make the stem units.


3. Draw a diagonal line from corner to corner on the F9-F squares. Place the F square, RST, over a F1-D square on the top corner as illustrated. Sew on the marked line. Cut the corner off 1/4" away from the sewn line. Press toward D.

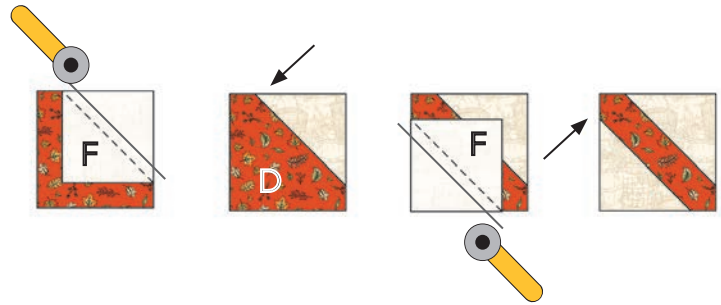

4. Place a F9-F square on the opposite corner of the step 3 unit as illustrated. Sew on the marked line. Cut the corner off 1/4" away from the sewn line. Repeat to make 4 stem units.

Make the leaf blocks.

5. Lay the pieces out as illustrated. Sew into rows. Then sew row-to-row. Press in the direction of the arrows. Make 4.

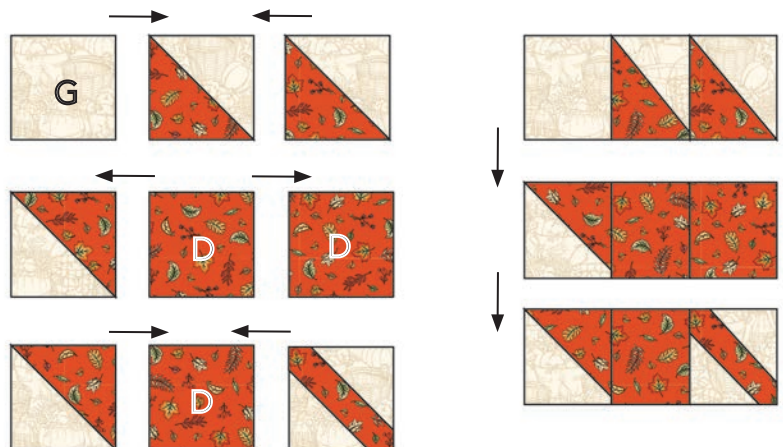

6. Repeat steps 1-5 to make the remaining blocks with Fabrics 2-8.

7. Sew the A rectangles to the right side of 3 leaf blocks in each fabric. Press toward A.



Make 3
6-1/2" x 12"



Fabric 2 - Make 3




Fabric 3 - Make 3



Fabric 4 - Make 3



Fabric 5 - Make 3

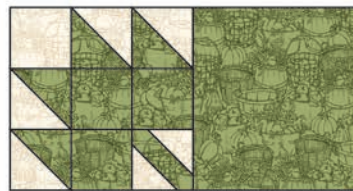

Fabric 6 - Make 3




Fabric 7 - Make 3



Fabric 8 - Make 3

8. Sew the blocks into rows as illustrated below, adding the matching B rectangles at the ends of the rows. Sew row to row, adding the sashing between each row and at the top and bottom of the quilt top. Press toward sashing.
9. Sew the side borders to the quilt top. Press the seams toward the borders.
10. Sew the top and bottom borders to the quilt top. Press the seams toward the borders.

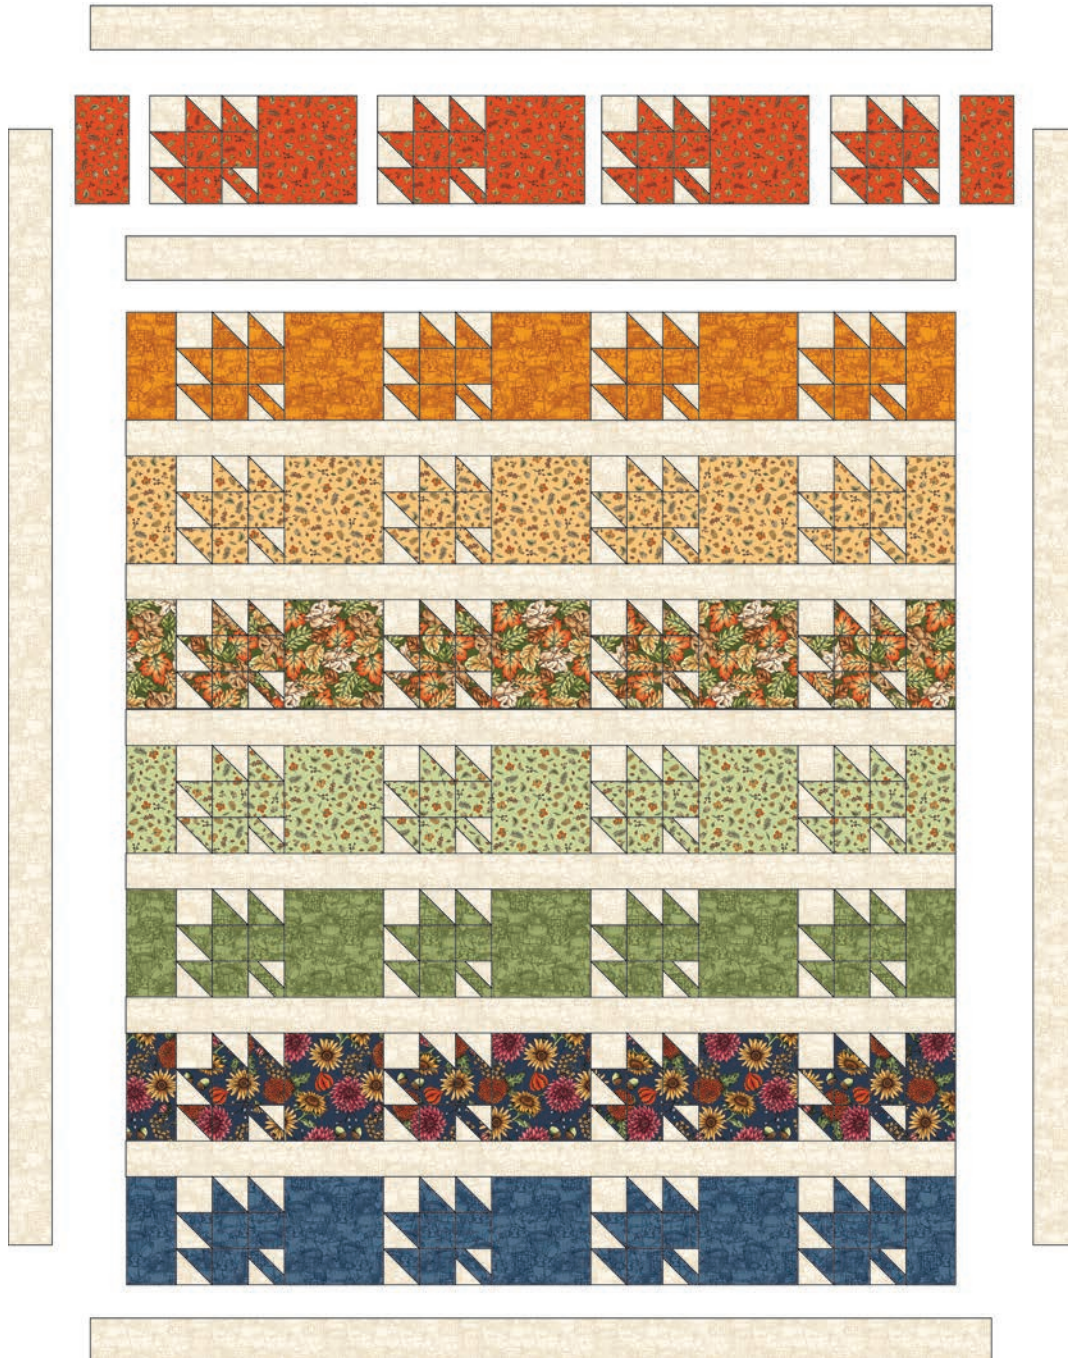

10. Layer the backing (wrong side up), batting and quilt top (right side up). Baste layers to secure. Quilt as desired. Trim the excess backing and batting.
11. Sew the binding strips together into one continuous strip. Press in half length-wise. Sew the binding to the quilt top with a 3/8" seam allowance. Turn the binding to the back side of the quilt and stitch down by hand with matching thread.

Quilt Top Planning Diagram

