


Savannah Squares

Pattern by modus

Quilt is 93" x 93"

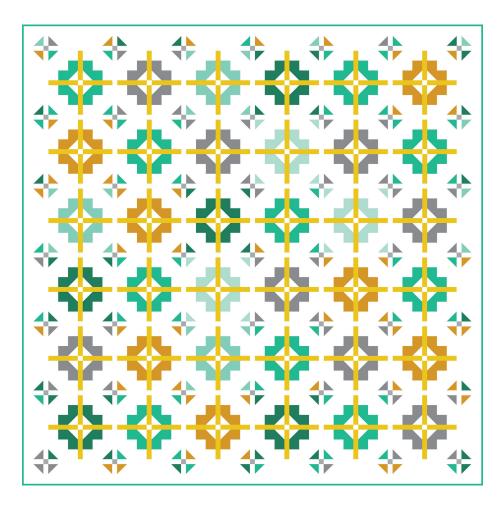

RECOMMENDED TOOLS



Multi-Size Half-Square Triangle Ruler

by Marti Michell Stock #8290

OR



Strip Tube Ruler Jr. by Cozy Quilt Designs Stock #CQ 05006

FABRIC REQUIREMENTS

Prints: 1 Jelly Roll*

Block Sashing - Accent: $1\frac{1}{2}$ yards

Cornerstones: 1 Fat Eighth or 1/8 yard

Background & Border: 7½ yards

Binding: 78 yard

Backing: 7½ yards

*Jelly Roll = $40 - 2\frac{1}{2}$ " x width of fabric strips

Savannah Squares Quilt is 93" x 93"

Cutting Instructions:

From the Jelly Roll:

• Select (36) strips. From each strip, cut (8) squares - 2½" x 2½". Set aside the remainder for the half-square triangles.

From the Block Sashing Fabric:

• Cut (7) 6½" x 42" width-of-fabric strips. Sub-cut (144) 1½" x 6½" strips for the block sashing.

From the Cornerstone Fabric:

• Cut (4) 1 ½" x 21" wof strips. Sub-cut a total of (49) 1½" x 1½" squares.

From the Background Fabric:

- Cut (82) 2½" x 42" wof strips.
 - Set aside 9 strips for the outer border.
 - Select 9 strips. Sub-cut a total of (144) 2½" x 2½" squares for blocks.
 - Select 32 strips. Sub-cut a total of (288) 2½" x 4½" rectangles for blocks.
 - Select 22 strips for half-triangle squares. Cut 18 of the strips in half 2½" x 21" wof.
 - Select 9 strips. Sub-cut a total of (24) 2½" x 9½" rectangles for pieced border.
 - Select 1 strip. Sub-cut a total of (28) 1½" x 2½" rectangles for pieced border. (The strip will allow for 26, cut the last two from remainders of the other strips.
- Cut (4) 13½" x 42" wof strips. Sub-cut (84) 1½" x 13½" rectangles for the sashing.
 - From the remainder of the 4th strip, cut (36) 1½" x 1½" squares.


From the Binding Fabric: Cut (10) $2\frac{1}{2}$ " x WOF strips.

Making the Half-Triangle Squares. HTSs will measure 2½" x 2½" unfinished - 340 are required.

Multi-Size Triangle Ruler: Layer one print and one background strip - $2\frac{1}{2}$ " x 21" - with right sides together. Use the 45-degree ruler with the $2\frac{1}{2}$ " line along the bottom edge of the strip, rotating the template every other cut. **Cut at least 9 triangles from each strip.** Join the triangles with a scant $\frac{1}{4}$ " seam along the long edge of the triangle. Press the seam to the medium/dark triangle.












Strip Tube Ruler: Layer one print and one background strip - 2½" x 21" - with right sides together. Stitch a scant ¼" seam on **both long edges** of the strip. Align the 2½" line of the Strip Tube ruler along the bottom stitching line and cut both sides of the triangle. Turn the ruler to cut the next triangle. **Cut at least 9 triangles.** Press the seam to the medium/dark triangle. (For more information - https://cozyquilt.com/PDFs/STRBonusGuide.pdf)

Sew strips RST on both long edges





All seams are a scant 1/4". Press the seams in the direction of the arrows.


1. From a single print, select (8) HTSs and (8) print squares - 2½" x 2½", and from the background - (4) squares - 2½" x 2½", and (8) rectangles - 2½" x 4½". Lay out the pieces as shown - this is one corner of a full block.



Join the pieces as shown. Press the seams in the direction of the arrrows.

The pieced unit will measure 6½" x 6½".


Repeat to make four matching units.



2. Lay out the 4 matching units, 4 sashing strips - 1½" x 6½", and 1 center square - 1½" x 1½" as shown.

Join the parts to make rows. Press the seams to the sashing strips in each row.

Join the rows to complete the block - press the seams to the middle sashing strip row. The block will measure $13\frac{1}{2}$ " x $13\frac{1}{2}$ ".



Repeat to make 36 blocks.


Construction. Lay out the blocks in six rows of six blocks each, alternating the blocks with $1\frac{1}{2}$ " x $13\frac{1}{2}$ " sashing strips and $1\frac{1}{2}$ " x $1\frac{1}{2}$ " cornerstones.

Join the blocks/parts in each row. Press the seams to the sashing strips - away from the blocks and cornerstones.

The pieced border rows are made with HTSs, $1\frac{1}{2}$ " x $2\frac{1}{2}$ " rectangles, and $2\frac{1}{2}$ " x $9\frac{1}{2}$ " rectangles. Press these seams to the rectangles - away from the HTSs.

Join the rows to complete the quilt top. Press the seams to the sashing strip rows - away from the block rows. Join the two side border rows to either side of the center. Finally, join the top and bottom border rows.

The quilt top will measure $89\frac{1}{2}$ " x $89\frac{1}{2}$ " at this stage.

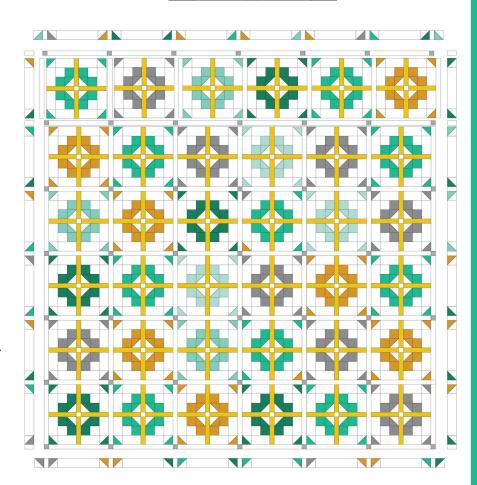

Completing the Top.

Piece the 2½" border strips. Press the seams open. Cut the following lengths:

- Side borders. Cut (2) 2½" x 89½" or the length of your quilt top.
- Top/Bottom borders. Cut (2) strips 2½" x 93½".

Join the $2\frac{1}{2}$ " x $89\frac{1}{2}$ " side border strips to the sides of the quilt top. Press the seams to the border strips.

Join the $2\frac{1}{2}$ " x $93\frac{1}{2}$ " top/bottom border strips to the top/bottom edges of the quilt top. Press the seams to the border strips.

Quilt and bind as desired.

