

3041 *Mint Crush* By Lisa Audit



**Twin Quilt: 64" x 81 1/2"**



[www.wilmingtonprints.com](http://www.wilmingtonprints.com)

Wilmington Prints: A World of Possibilities




# Mint Crush

Please read all instructions carefully AND identify all fabrics before beginning.

All instructions include a 1/4" seam allowance and strips are cut selvege to selvege, unless stated otherwise.

## 1. Cut the following:


PLEASE NOTE:



Cut all 4-3/8" squares in half diagonally for the  number of triangles indicated in [ ].


**Fabric A** - PLEASE NOTE: Panels do not always print the size intended. For this pattern, the panel has a coping border added then trimmed so the panel will fit the quilt correctly.

Fussy cut 1/4" beyond outside right and left edges of panel to approximately 23-1/2" wide. Cut panel to 41-1/2" tall.


**Fabric B** - Referring to the quilt image, fussy cut strips, the length of fabric parallel to selvege:  
(2) 5-1/2" x 82 and (2) 5-1/2" x 64 wide floral stripe borders

**Fabric C** - Cut (3) 4-3/8" strips, subcut (20) 4-3/8" squares  [40] and (8) 4" squares

**Fabric D** - Cut (2) 7 1/2" strips, subcut (2) 7 1/2" x 11" pieces, (4) 7 1/2" squares, and (6) 4 3/8" squares   [cut 3 in 1 direction and 3 in the opposite direction for 12 triangles]

**Fabric E** - Cut (4) 4-3/8" strips, subcut (30) 4-3/8" squares  [60]

**Fabric F** - Cut (2) 2-1/4" strips  
Cut (2) 1-1/2" strips, subcut (2) 1-1/2" x 26" strips  
Cut (6) 1-1/2" strips, sewn together end to end and cut into (2) 1-1/2" x 64" and (2) 1-1/2" x 46-1/2" flat piping strips

**Fabric G** - Cut (2) 4-3/8" strips, subcut (16) 4-3/8" squares  [32]

**Fabric H** - Cut (4) 1-3/4" strips. Sew 2 strips together end to end and cut into (1) 1-3/4" x 43-1/2" and (1) 1-3/4" x 28-1/2" borders. Repeat for a total of 2 each length border.


**Fabric I** - Cut (13) 2" strips, sewn together end to end and cut into (2) 2" x 78", (2) 2" x 64-1/2", (2) 2" x 64", and (2) 2" x 50-1/2" borders

**Fabric J** - Cut (6) 2-1/2" strips, sewn together end to end and cut into (2) 2-1/2" x 60" and (2) 2-1/2" x 46-1/2" borders

**Fabric K** - Cut (8) 2-1/2" strips (binding)


## 2. Piecing Order:

1. Sew 1 each **Fabrics C** and **D** 4-3/8" triangles together along their long edges. Make a total of 3 each Units 1a-1d (4" square unfinished), noting orientation of triangles.

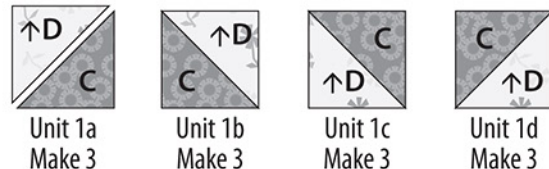

Arrows indicate orientation of directional prints.


2. Sew 1 each **Fabrics C** and **E** 4-3/8" triangles together along their long edges. Make a total of 28 Unit 2 (4" square unfinished). In the same manner, make 32 Unit 3.




3. Draw a diagonal line across the wrong side of each of the **Fabric C** 4" squares. 

Letters in italics indicate wrong side of fabric.

4. Arrange a marked **Fabric C** 4" square right sides together on the bottom right corner of a **Fabric D** 7-1/2" square as shown. Stitch along marked line. Trim seam allowance to 1/4". Press corner out to complete Unit 4a (7-1/2" square unfinished).

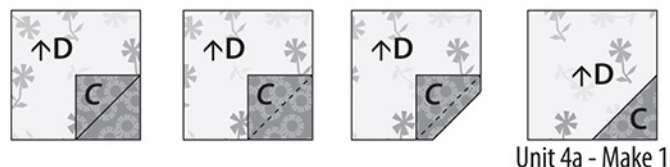

5. In the same manner, make 1 each Units 4b-4d noting placement of corner to which **Fabric C** square is added.

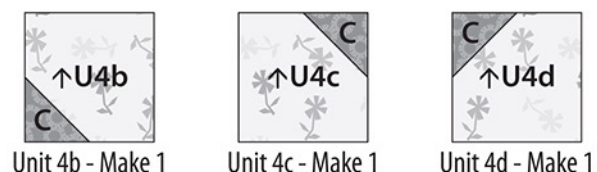

Shading of diagrams may vary depending on fabrics used.

# Mint Crush

6. Using the same stitch-and-flip technique in Step 4, use 2 marked **Fabric C** squares to create triangles on bottom corners of a **Fabric D** 7-1/2" x 11" piece.



Unit 5 - Make 2

Make a total of 2 Unit 5 (7-1/2" x 11" unfinished).

7. Refer to Quilt Layout (Page 3) for arrangement and placement of panel, strips, units, and borders.

8. Stitch **Fabric F** 2-1/4" x width of fabric strips to sides of the **Fabric A** panel. Trim strip ends even. **Trim bordered panel to 26" wide.** Add 1-1/2" x 26" **Fabric F** strips to top and bottom of panel. Bordered panel measures 26" x 43-1/2" (unfinished).

9. Sew **Fabric H** 1-3/4" x 43-1/2" borders to right and left sides of bordered panel. Add **Fabric H** 1-3/4" x 28-1/2" borders to top and bottom of bordered panel.

10. Arrange 1 each Units 1a-1d, 8 each Units 2 and 3, and 1 Unit 5 in 11 rows on right and left sides of quilt. Stitch into rows. Sew rows into borders (7-1/2" x 46" unfinished). Stitch to right and left sides of quilt.

11. Arrange 1 each Units 1a and 1b, 6 Unit 2, and 8 Unit 3 in 2 rows above quilt. Sew into rows. Stitch rows together. Add Units 4a and 4b to ends of border (7-1/2" x 42-1/2" unfinished). Sew to top of quilt.

12. Arrange 1 each Units 1c and 1d, 6 Unit 2, and 8 Unit 3 in 2 rows below quilt. Sew into rows. Stitch rows together. Add Units 4c and 4d to ends of border (7-1/2" x 42-1/2" unfinished). Sew to bottom of quilt.


13. Sew **Fabric J** 2-1/2" x 60" borders to right and left sides of quilt. Add **Fabric J** 2-1/2" x 46-1/2" borders to top and bottom of quilt.

14. Fold and press **Fabric F** 1-1/2" x 64" and 1-1/2" x 46-1/2" strips in half lengthwise, right side out, forming 3/4" wide flat piping strips.

15. Baste 3/4" x 64" **Fabric F** flat piping strips on top of sides of quilt, with raw edges even with raw edges of **Fabric J** border. Baste 3/4" x 46-1/2" **Fabric F** flat piping on top of top and bottom of quilt, with raw edges even with raw edges of **Fabric J** border.


16. Sew **Fabric I** 2-1/2" x 64" borders to right and left sides of quilt. Press seam allowances toward **Fabric I** borders leaving flat piping over **Fabric J** borders. Add **Fabric I** 2-1/2" x 50-1/2" borders to top and bottom of quilt.

17. Center **Fabric B** 5-1/2" x 82" borders on right and left sides of quilt and **Fabric B** 5-1/2" x 64" borders on top and bottom of quilt. Stitch borders to sides starting and stopping 1/4" from corners of quilt center. Do not trim. Press borders out.



*Letters in italics indicate wrong side of fabric.  
Arrows indicate orientation of directional prints.*

18. Working with 1 corner at a time, fold the quilt right sides together so the outside edges of the borders line up. Using a 45-degree ruler, mark from the end of border seams to outer edges of borders. Stitch along marked line. Trim seam allowance to 1/4". Press corner seam open. Repeat on remaining corners.

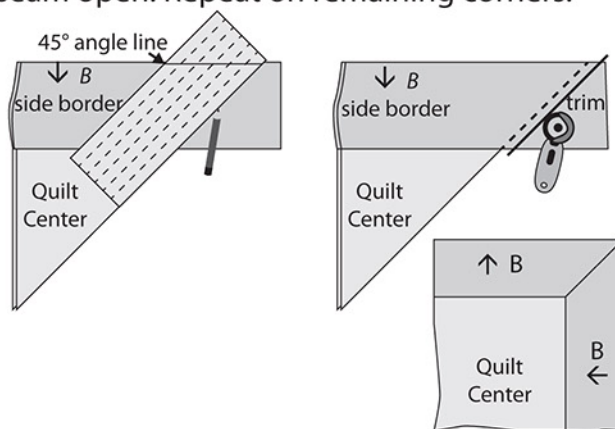

19. Sew **Fabric I** 2-1/2" x 78" borders to right and left sides of quilt. Add **Fabric I** 2-1/2" x 64-1/2" borders to top and bottom of quilt.

20. The quilt measures approximately 64-1/2" x 82" (unfinished). Make backing (**Fabric L**) approximately 8" larger than the top.

21. Layer and baste top, batting, and backing together. Quilt as desired. Attach binding (**Fabric K**) and enjoy!!

*Shading of diagrams  
may vary depending on fabrics used.*




# Mint Crush

## QUILT LAYOUT

Border measurements are the cut size.

Arrows indicate orientation of directional prints.

Shading of Quilt Layout may vary depending on fabrics used.

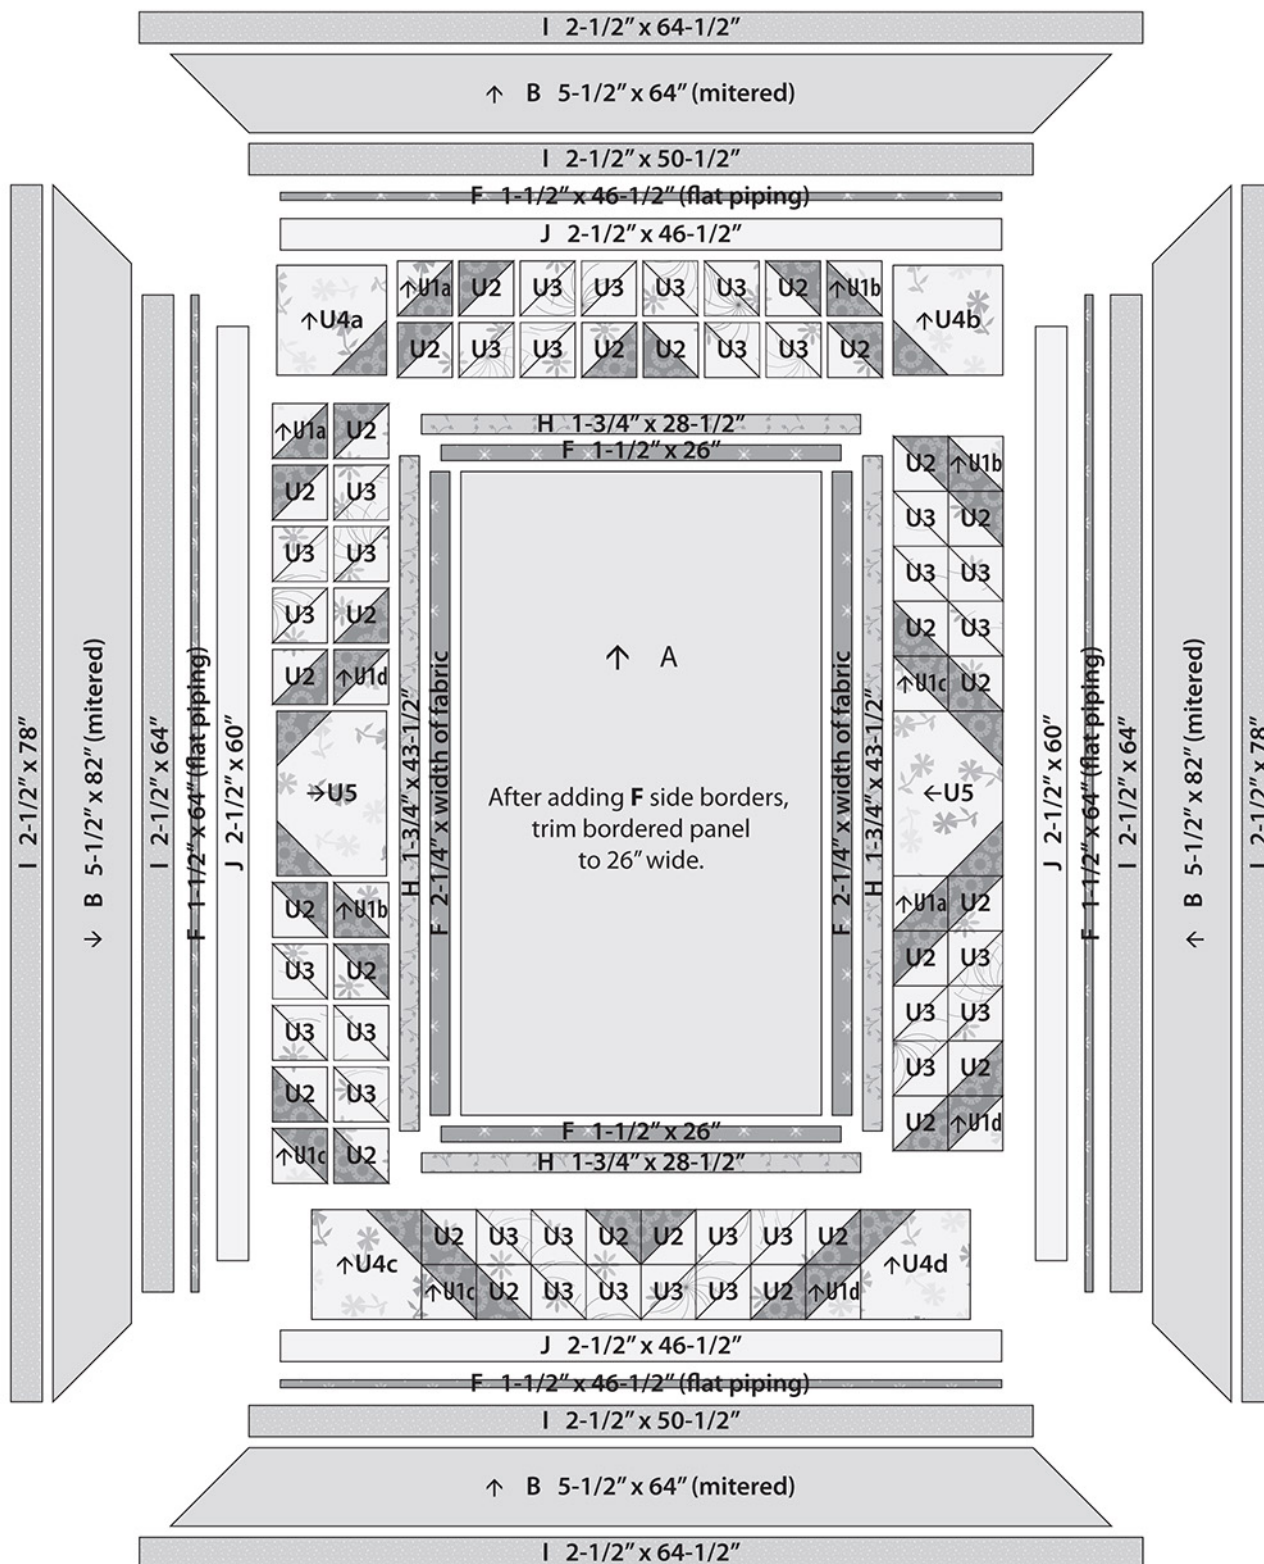

# Mint Crush

By Lisa Audit



**A 3041-17762-431**  
2/3 yd  
(1 Panel)



**B 3041-17763-473**  
2 1/2 yards



**C 3041-17764-137**  
1/2 yard



**D 3041-17765-374**  
5/8 yard



**E 3041-17766-134**  
5/8 yard



**F 3041-17766-734**  
2/3 yard



**G 3041-17767-174**  
3/8 yard



**H 3041-17767-373**  
1/3 yard



**I 3041-17770-311**  
1 yard



**J 1080-31588-100**  
5/8 yard



**K 1077-89205-707**  
2/3 yard  
(Binding only)



**L Backing Only**  
44/45" - 5 1/8 yards  
108" - 2 1/8 yards

