


DREAM PANEL QUILT & RUNNER


Riley Blake
DESIGNS



*American
Dream*
By Dani Hogstad

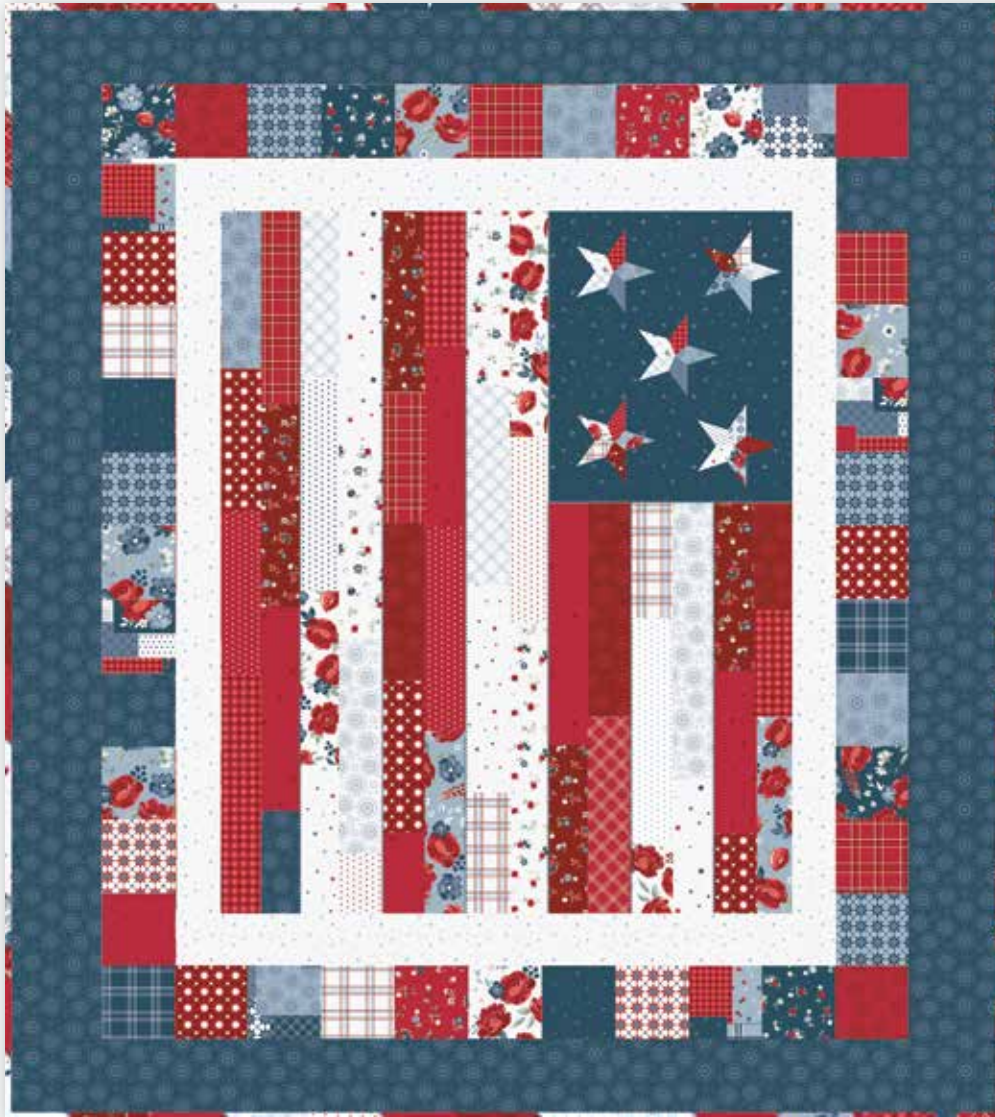

DREAM PANEL QUILT AND RUNNER

Finished quilt: approx. 61" x 70"

Measurements include ¼" seam allowance.

Sew with right sides together unless otherwise stated.

Please check our website www.rileyblakedesigns.com/pattern-updates for any revisions before starting this project. This pattern requires a basic knowledge of quilting technique and terminology. The quilt and block diagrams portrayed are virtual images. The layout and look of your project may differ when using actual fabric.

FABRIC REQUIREMENTS

(2) American Dream Flag Panels (P11937)*

(2) American Dream 5" Stackers (5-11930-42)

1½ yards Navy Burst (C11931)

1/2 yard Off White Stars (C11933)

5/8 yard Navy Stars (C11933)*

*Includes binding

CUTTING DIRECTIONS



American Dream Flag Panels

Fussy cut (1) 35½" x 43½" rectangle centered over the panel design for quilt.




Fussy cut (1) 15" x 18" rectangle centered over the stars portion of the panel for the Runner.



Navy Burst


Cut (6) 6" x WOF strips



White Stars

Cut (3) 3¼" x WOF strips for side borders

Cut (2) 3¾" x WOF strips for top/bottom borders



Navy Stars

Cut (2) 2¼" x WOF strips for Runner Borders

Cut (4) 2½" x WOF strips for Runner Binding

QUILT ASSEMBLY

Refer to the quilt photo for the placement of prints.

Borders

Seam allowances vary so measure through the center of the quilt before cutting border pieces.

Borders are sewn to the 35½" x 43½" panel. Sew side borders first. Press seams towards the borders.

Border 1

Side borders should be 3¾" x 43½". Top and bottom borders should be 3¾" x 50".

Border 2


Sew 11 of the 5" squares together (5" x 50"). Press the seams in one direction. Repeat to make 2 side borders and 2 borders for top and bottom.

Border 3

Side borders should be 6" x 59". Top and bottom borders should be 6" x 61". Quilt top should measure 61" x 70".

Prepare the scrappy binding. Using the 2½" strips cut on the bias from the remaining leftover panel for quilt binding, sew the strips together end to end and prepare the quilt binding using your favorite binding method.

Your quilt top is complete!!!

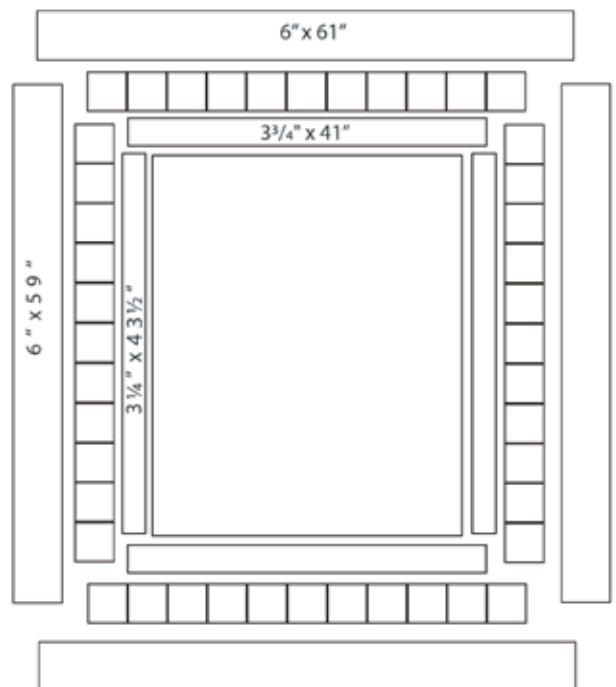

DREAM PANEL QUILT AND RUNNER

RUNNER ASSEMBLY

Refer to the photo for the placement of prints.

Borders are sewn to the 15" x 18" fussy cut star section of the panel. Sew side borders first. Press seams towards the borders.

Border 1

Side borders should be $2\frac{1}{4}$ " x 18". Top and bottom borders should be $2\frac{1}{4}$ " x $18\frac{1}{2}$ ".

Sew 4 of the 5" squares together to create one row. Repeat to make a total of ten rows. The scrappy square block should measure $18\frac{1}{2}$ " x $45\frac{1}{2}$ ".

Sew the star section to scrappy square block together as shown. Press seams towards the panel block. The runner top should measure $18\frac{1}{2}$ " x $66\frac{1}{2}$ ".

Your runner top is complete!!!

Layer your backing, batting and runner top. Quilt as desired. Bind the edges with your favorite binding method using the Navy Stars $2\frac{1}{2}$ " strips. Layer your backing, batting and quilt top. Quilt as desired. Bind the edges with your favorite binding method using the prepared $2\frac{1}{2}$ " bias strips. Enjoy and share your runner and quilt using the hashtags #AmericanDreamfabric #dreampanel #rileyblakedesigns #iloverileyblake.

