

# Salt & Pepper

Quilt Design by Kay M. Capps Cross

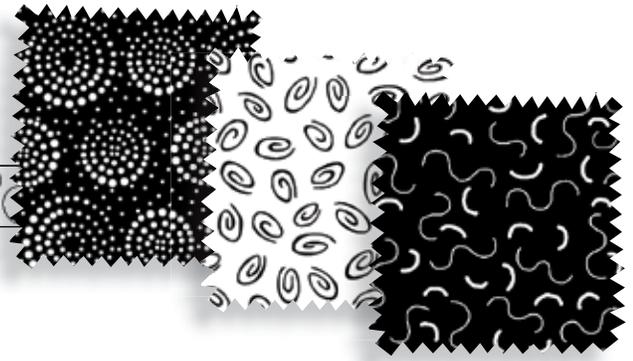


Table Topper size: approximately 60" x 60"

*Featuring fabrics from Salt & Pepper  
by P&B Textiles*



P&B Textiles • pbtex.com • 800-351-9087 • 208 Clock Tower Square, Portsmouth, RI 02871

# Salt & Pepper

Fabric collection by P&B Textiles

Quilt designed by Kay M. Capps Cross

Skill level: Intermediate • Finished Quilt Size: approx. 60" x 60"

## Quilt Yardages:

Fabric A: <b>RS&amp;P 4951 WK</b> .....	1/4 yard
Fabric B: <b>RS&amp;P 4949 KW</b> .....	1/8 yard
Fabric C: <b>RS&amp;P 4952 WK</b> .....	1/4 yard
Fabric D: <b>RS&amp;P 4955 KW</b> .....	1/8 yard
Fabric E: <b>RS&amp;P 4946 WK</b> .....	1/4 yard
Fabric F: <b>RS&amp;P 4947 KW</b> .....	1/8 yard
Fabric G: <b>SUE6 302 BB</b> .....	3/8 yard
Fabric H: <b>RS&amp;P 4954 WK</b> .....	1 3/4 yards
Fabric I: <b>RS&amp;P 4950 WK</b> .....	1/2 yard
Fabric J: <b>RS&amp;P 4957 WK</b> .....	1/8 yard
Fabric K: <b>RS&amp;P 4950 KW</b> .....	1/4 yard
Fabric L: <b>RS&amp;P 4948 WK</b> .....	1/4 yard
Fabric M: <b>RS&amp;P 4956 KW</b> .....	1/4 yard
Fabric N: <b>RS&amp;P 4949 WK</b> .....	1/8 yard
Fabric O: <b>RS&amp;P 4951 KW</b> .....	1 1/8 yards
Fabric P: <b>RS&amp;P 4954 KW</b> .....	3/4 yard
Backing: .....	4 yards
Batting .....	68" x 68"

Additional supplies: Removable marking pen

## Cutting Instructions:

Please read all instructions carefully before beginning. Strips are cut across the width of fabric (perpendicular to selvages) unless otherwise stated. All seams are sewn with a 1/4" seam unless otherwise stated. Label all pieces. QST = Quarter Square Triangle

### From Fabric A:

1. Cut two 3" strips. Subcut three 3" x 20" rectangles.

### From Fabric B:

1. Cut one 3" strip. Subcut two 3" x 20" rectangles.

### From Fabric C:

1. Cut two 3" strips. Subcut three 3" x 20" rectangles.

### From Fabric D:

1. Cut one 3" strip. Subcut two 3" x 20" rectangles.

### From Fabric E:

1. Cut two 3" strips. Subcut three 3" x 20" rectangles.

### From Fabric F:

1. Cut one 3" strip. Subcut two 3" x 20" rectangles.

### From Fabric G:

1. Cut six 1 1/4" strips. (Border 2)  
2. Cut one 3" strip. Subcut two 3" x 20" rectangles.

### From Fabric H:

1. Cut one 21 1/4" strip. Subcut one 21 1/4" square. Cut square on the diagonal twice to make four quarter square triangles (QST). Recut remainder of strip to 14 1/2" and cut one 14 1/2" square.  
2. Cut one 14 1/2" strip. Subcut three 14 1/2" squares.

### From Fabric I:

1. Cut six 2" strips. (Border 1)

### From Fabric J:

1. Cut one 3" strip. Subcut two 3" x 20" rectangles.

### From Fabric K:

1. Cut two 3" strips. Subcut three 3" x 20" rectangles.

### From Fabric L:

1. Cut two 3" strips. Subcut four 3" x 20" rectangles.

### From Fabric M:

1. Cut two 3" strips. Subcut three 3" x 20" rectangles.

### From Fabric N:

1. Cut one 3" strip. Subcut two 3" x 20" rectangles.

### From Fabric O:

1. Cut seven 4 1/2" strips. (Outer Border)  
2. Cut one 3" strip. Subcut one 3" x 20" rectangles.

### From Fabric P:

1. Cut seven 2 1/4" strips. (Binding)

## Piecing Instructions:

- Sew the following strip sets together, staggering the strips by approximately 2 1/2". Press the seams open. (Figure 1)
  - Set 1: Fabric A, Fabric B, Fabric C, Fabric A
  - Set 2: Fabric B, Fabric C, Fabric D, Fabric E
  - Set 3: Fabric C, Fabric D, Fabric E, Fabric F
  - Set 4: Fabric A, Fabric E, Fabric F, Fabric G
  - Set 5: Fabric G, Fabric J, Fabric K, Fabric L
  - Set 6: Fabric J, Fabric K, Fabric L, Fabric M
  - Set 7: Fabric K, Fabric L, Fabric M, Fabric N
  - Set 8: Fabric L, Fabric M, Fabric N, Fabric O

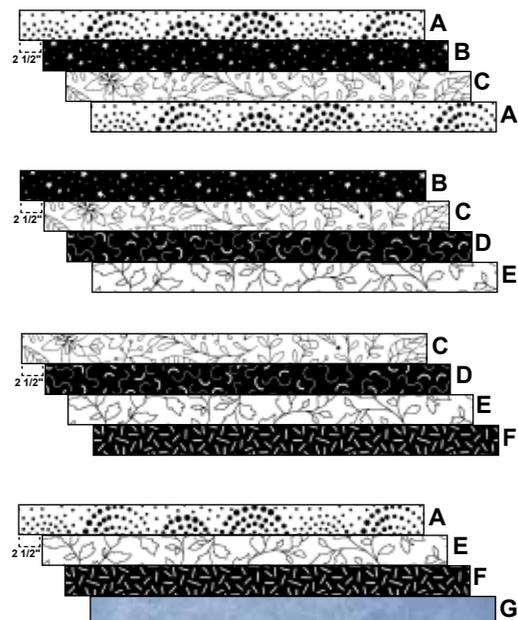


Figure 1

Set 1  
Make 1

Set 2  
Make 1

Set 3  
Make 1

Set 4  
Make 1

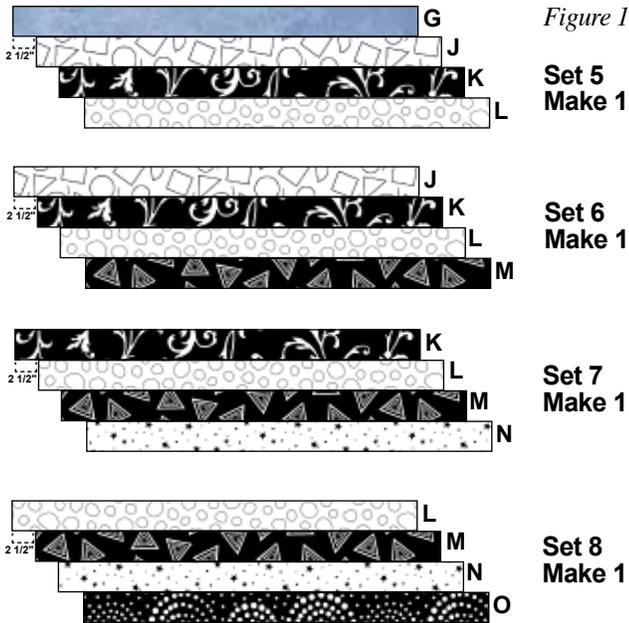


Figure 1

Set 5  
Make 1

Set 6  
Make 1

Set 7  
Make 1

Set 8  
Make 1

2. Cut the end off the strip set on a 45° angle, **lining up the 45° mark of your ruler with the long straight edge of the strip set**. Cut four 3" wide units from each strip set, lining up the 3" line with the diagonal cut edge. Double check the angle every two or three cuts and adjust when needed if the angle is off the 45° line. Use a removable marking pen to mark the seam allowances in each corner. (Figure 2)

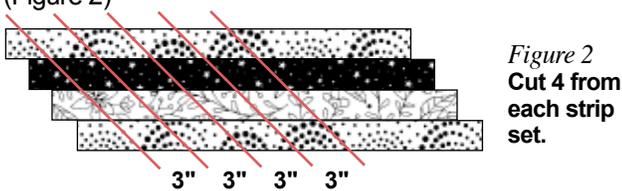


Figure 2  
Cut 4 from each strip set.

3. Pin the Set 1 unit to the Set 2 unit, matching the seam allowances. Sew them together, but do NOT press yet (you may lose your markings). Pin and sew the Set 3 unit to the other side of the Set 2 unit. Pin and sew the Set 4 units to the other side of the Set 3 unit to make one Inside Diamond. Make four Inside Diamonds total. (Figure 3)

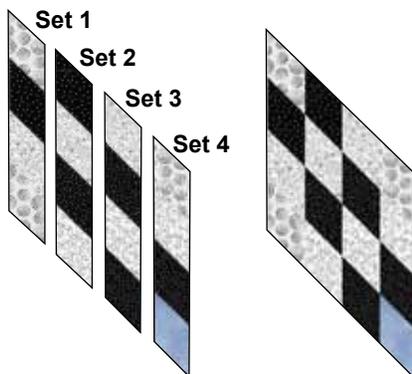


Figure 3  
Make 4  
Inside  
Diamonds

4. Repeat step 3 with Set 5-6-7-8 Units, sewing them together in order, to make four Outside Diamonds. (Figure 4)

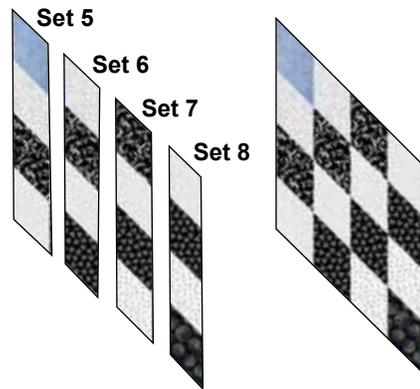


Figure 4  
Make 4  
Outside  
Diamonds.

5. Gently finger press the seam allowances open on all diamonds first, then press with an iron. Be sure to only apply pressure straight down to keep the seams from skewing.

### Quilt Assembly:

1. Arrange Inner Diamonds, Outside Diamonds, four H QST and four 14 1/2" H squares. Mark the 1/4" seam lines on the corners of squares, diamonds, and QST where the edges touch. (Figure 5)

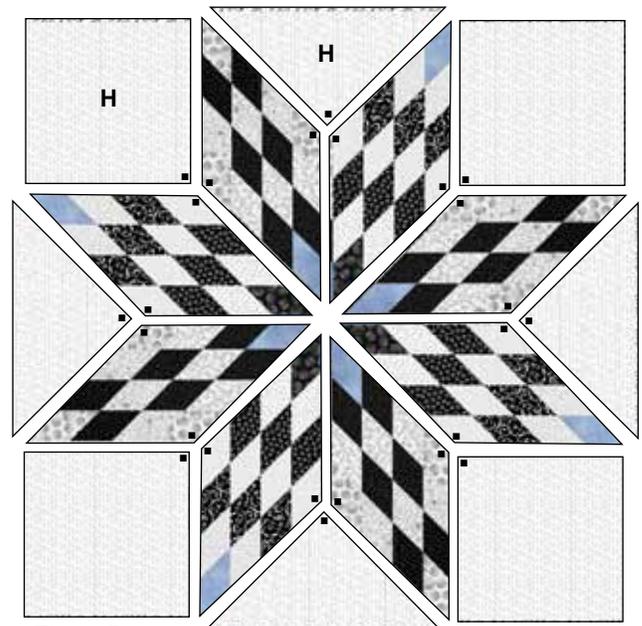


Figure 5

2. Start with the corner H squares and the two diamonds that touch it, match the connecting dots and sew the diamonds to the square stopping at the dots and back-stitching. Starting at the inside corner, back-stitch and sew diamonds together. Press seams open. (Figure 6) Repeat with the other 3 sets of squares and diamonds.




Figure 6

3. Sew one triangle to two square sets in the same manner as in step 2. Make two halves. Press seams open. (Figure 7).

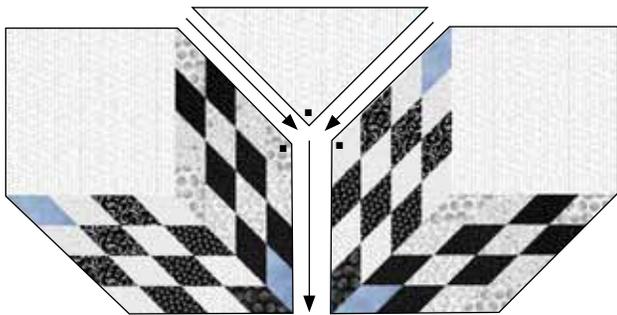


Figure 7 **Make 2.**

4. Sew the two halves together with the remaining two triangles. After sewing the triangles to the diamonds, match the center seams and back-stitching from the seam intersection on one side, sew to the other side and backstitch at the other seam intersection. Press seams open. (Figure 8)

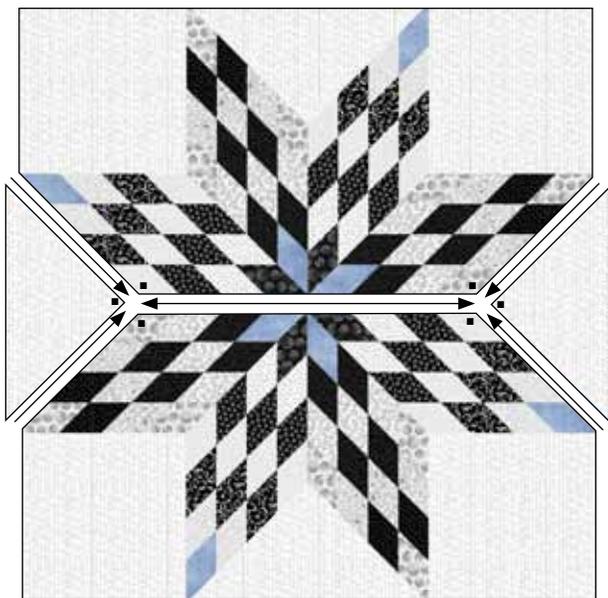



Figure 8

5. Sew six 2" I strips together with diagonal seams. Press seams open.
6. Measure through the vertical center of the quilt and trim two

- strips to this length. Match centers and sides, pin and sew to sides of the quilt. Press to border. (Quilt Diagram)
7. Measure through the horizontal center and trim two strips to this width. Match centers and sides, pin and sew to top and bottom of quilt. Press to border. (Quilt Diagram)
8. Repeat steps 5-7 with the 1 1/4" G strips and 4 1/2" O strips. (Quilt Diagram)

### Finishing:


1. Prepare backing using two lengths to measure 68" x 68". Press seam open.
2. Layer runner top, batting, and backing. Baste layers together.
3. Quilt as desired.
4. Trim layers even with runner top squaring corners.
5. Join seven 2 1/4" P binding strips with diagonal seams. Press seams open. Attach binding using your favorite method
6. Make a label and sew to the back of the runner.

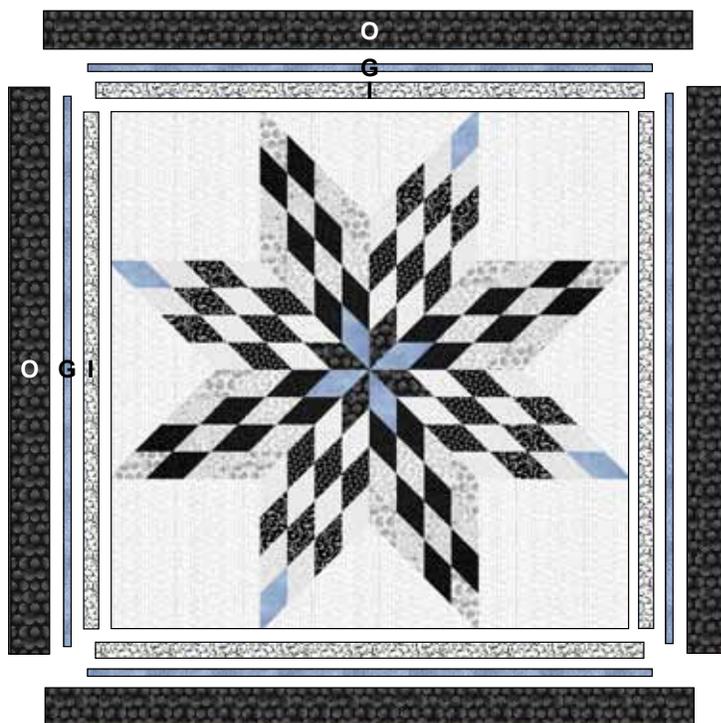

Quilt Diagram

# Salt & Pepper


Fabric Collection by  
P&B Textiles




RS&P 4946 KW




RS&P 4946 WK\*




RS&P 4947 KW\*




RS&P 4947 WK\*

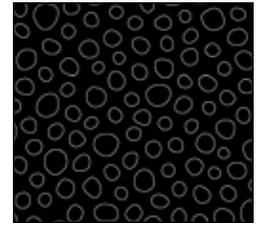


RS&P 4948 KW




RS&P 4948 WK\*




RS&P 4949 KW\*




RS&P 4949 WK\*




RS&P 4950 KW\*

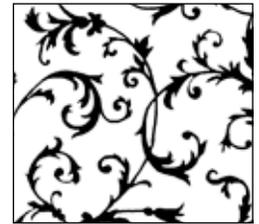

RS&P 4950 WK\*




RS&P 4951 KW\*



RS&P 4951 WK\*



RS&P 4952 KW



RS&P 4952 WK\*




RS&P 4953 KW




RS&P 4953 WK




RS&P 4954 KW\*



RS&P 4954 WK\*



RS&P 4955 KW

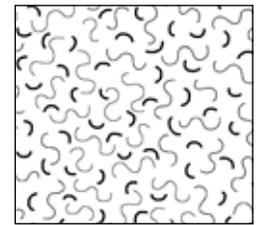

RS&P 4955 WK




RS&P 4956 KW\*



RS&P 4956 WK\*



RS&P 4957 KW



RS&P 4957 WK



SUE6 302 BB\*

