



64" x 64"



MAG04/24/2023



### FINISHED QUILT SIZE 63 ½" x 63 ½"

Measurements include ¼" seam allowance. Sew with right sides together unless otherwise stated.

#### Please check our website www.rileyblakedesigns.com/

pattern-updates for any revisions before starting this project. This pattern requires a basic knowledge of quilting techniques and terminology. The quilt and block diagrams portrayed are virtual images. The layout and look of your project may differ when using actual fabric. Press seams OPEN unless otherwise noted.

**WOF** = Width of Fabric **RST** = Right Sides Together **SNF** = Stitch and Flip

#### FABRIC REQUIREMENTS

- 1 Lost at Sea You, Me and the Sea Panel (P13407-PANEL)
- 1 ⅓ yard Bee Backgrounds Blue Tiny Circles (C6384-BLUE )
- 1 1/2 yard Seafoam Lost at Sea Waves (C13406-SEAFOAM) (includes binding)
- 1 yard Navy Lost at Sea Set Sail (C13403-NAVY)
- 1 Fat Quarter each:

Navy Lost at Sea Main (C13400-NAVY) Poppy Lost at Sea Seagulls Flight (C13401-POPPY) Seafoam Lost at Sea Whales (C13402-SEAFOAM) Seafoam Lost at Sea Happy Crabs (C13404-SEAFOAM) Navy Lost at Sea Starfish and Anchors (C13405-NAVY)

### **OTHER SUPPLIES**

**Basic Sewing Supplies** 2 yards WIDEBACK Backing 71 ½" x 71 ½" piece of Batting

### **CUTTING REQUIREMENTS**

- Please read instructions before cutting fabrics.
- Cutting Instructions are based on a 42" WOF.
- Refer to the quilt photo for the placement of each of the fabrics.
- Use a straight edge ruler and rotary cutter to cut your fabrics.
- Follow trimming instructions carefully. Accurate measuring techniques are key.

### **CUTTING INSTRUCTIONS**



### You, Me and the Sea Panel


Cut (4) panels out at 17" x 17", centering the image.



#### **Blue Tiny Circles**

- Cut (1) 1 <sup>1</sup>/<sub>2</sub>" x WOF strip, subcut:
  - (15) 1 ½"x 1 ½" squares, label as A
- Cut (6) 2 1/2" x WOF strips, subcut:
  - (20) 2 ½" x 7 ¾" rectangles, label as B
  - (10) 2 ½" x 5 ¾" rectangles, label as C
  - (10) 2" x 2" squares, label as D \*Note the size of the D squares is 2" x 2". Trim down a leftover portion of one of your 2 1/2" strips for these squares.
- Cut (3) 3" x WOF strips, subcut:
  - (10) 3" x 1 <sup>1</sup>/<sub>2</sub>" rectangles, label as E
  - (10) 3" x 2" rectangles, label as F
  - (10) 3" x 2 <sup>3</sup>/<sub>4</sub>" rectangles, label as G
  - (10) 3" x 3 ¼" rectangles, label as H
- Cut (5) 3 ½" x WOF strips, subcut:
  - (10) 3 ½" x 4" rectangles, label as I
  - (10) 3 1/2" x 2 3/4" rectangles, label as J
  - (10) 3 ½" x 7 ¾" rectangles, label as K
  - (10) 3 ½" x 3 ½" squares, label as L
- Cut (3) 1" x WOF strips, subcut:
  - (5) 1" x 18" strips, label as M



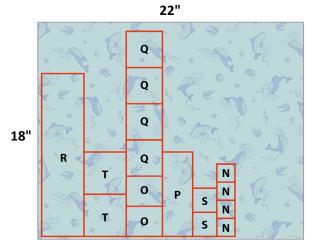

### Fat Quarters (cut from each)

- (4)  $1 \frac{1}{2}$  x  $1 \frac{1}{2}$  squares, label as N
- (2) 2  $\frac{1}{2}$  x 3" rectangles, label as O
- (1) 2 ½" x 7 ½" rectangle, label as P
- (4) 3" x 3" squares, label as Q
- (1) 3  $\frac{1}{2}$  x 13  $\frac{1}{2}$  rectangle, label as R
- (2) 2" x 2" squares, label as S
- (2) 3 1/2" x 3 1/2" squares, label as T



#### Sea Foam Waves

- Cut (7) 2 1/2" x WOF strips, set aside for binding
- Cut (8) 1" x WOF strips, subcut:
  - (8) 1" x 17" strips
  - (8) 1" x 18" strips
- Cut (6) 1 1/2" X WOF strips, subcut (2) WOF strips into:
  - (2) 1 1/2" x 13 1/2" strips
  - (2) 1 1/2" x 11 1/2" strips



#### Navy Set Sail


Cut (6) 5" x WOF strips; subcut (2) WOF strips into: (2) 5" x 22 ½" strips

(2) 5" x 13 ½" strips

### SEWING INSTRUCTIONS


#### STITCH AND FLIP METHOD (SNF)

Place (2) RST matching the raw edges in one corner. Draw a diagonal line on the wrong side of the top piece across the corner. Sew on the drawn line. Trim the seam allowance above the sewn line to ¼". Flip the top piece away from the bottom piece and press, replacing the corner. The size of the larger, original piece does not change. Press seam allowance towards the corner.




#### QUILT ASSEMBLY

- Gather (2) 1" x 17" Sea Foam Waves strips, (2) 1" x 18" Sea Foam Waves strips, and (1) 17" x 17" You, Me and the Sea Panel square. Sew (1) 1" x 17" strip to each side of the 17" x 17" Panel square. Press.
- 2. Sew (1) 1" x 18" strip to the top and bottom of the same Panel square. Press. Square should measure 18" x 18".
- Repeat steps 1-2 with remaining (6) 1" x 17" strips, (6) 1" x 18" strips, and (3) Panel squares for a total of (4) 18" x 18" bordered Panel squares.

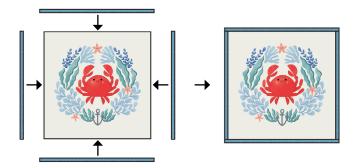



- 4. Gather (1) 2" x 2" D square and (1) 2" x 2" S square. Draw a diagonal line on the wrong side of the D square.
- 5. Sew ¼" away from both sides of the drawn line. Trim on drawn line. Press.
- 6. Repeat with remaining (9) D and S squares for a total of (20)  $1 \frac{1}{2}$ " x  $1 \frac{1}{2}$ " HSTs. Label as HST A.

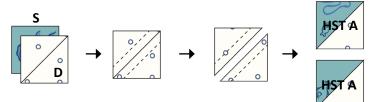



- Gather (1) 3 ½" x 3 ½" L square and (1) 3 ½" x 3 ½" T square. Draw a diagonal line on the wrong side of the L square.
- Sew ¼" away from both sides of the drawn line. Trim on drawn line. Press.
- Repeat with remaining (9) L and T squares for a total of (20) 3" x 3" HSTs. Label as HST B.
- 10. Gather (2) 1 ½" x 1 ½" A squares and (1) 2 ½" x 3" O rectangle.
- 11. Using the SNF technique, draw a diagonal line on the wrong side of the (2) 1 ½" x 1 ½" A squares. Place (1) 1 ½" A square onto the top LEFT corner of the 2 ½" x 3" O rectangle, RST and edges aligned. Note the orientation of the drawn diagonal line as well as the position of the rectangle in the diagram at right.
- 12. Sew along the drawn diagonal line. Trim excess corner fabric to ¼". Press toward the corner.
- 13. Place (1) 1  $\frac{1}{2}$ " A square onto the top **RIGHT** corner of the same 2  $\frac{1}{2}$ " x 3" O rectangle, RST and edges aligned. Note the orientation of the drawn diagonal line in the diagram at right.
- 14. Sew along the drawn diagonal line. Trim excess corner fabric to ¼". Press toward the corner.
- 15. Repeat with remaining (10) 1 ½" x 1 ½" A squares and
  (5) 2 ½" x 3" O rectangles for a total of (5) SNF 2 ½" x 3" rectangles. Label all as AO.

**Note**: Remaining (5) 1 ½" x 1 ½" A squares and (5) 2 ½" x 3" O rectangles will be used later in the Anchor block assembly.

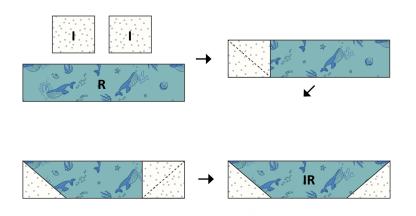

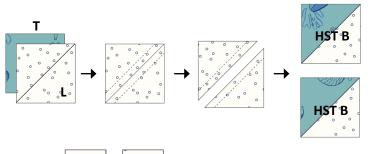




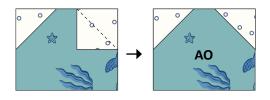

- 16. Gather (2) 3 ½" x 4" I squares and (1) 3 ½" x 13 ½" R rectangle.
- 17. Using the SNF technique, draw a diagonal line on the wrong side of the (2) 3 ½" x 4" I squares. Place (1) 3 ½" x 4" I square onto the LEFT side of (1) 3 ½" x 13 ½" R rectangle, RST and edges aligned. Note the orientation of the drawn diagonal line as well as the position of the rectangle in the diagram at left.
- Sew along the drawn diagonal line. Trim excess corner fabric to ¼". Press toward the corner.
- 19. Place (1) 3 ½" x 4" I square onto the RIGHT side of the same 3 ½" x 13 ½" R rectangle, RST and edges aligned. Note the orientation of the drawn diagonal line in the diagram at left.
- 20. Sew along the drawn diagonal line. Trim excess corner fabric to ¼". Press toward the corner.
- 21. Repeat with remaining (8) 3  $\frac{1}{2}$ " x 4" I squares and (4) 3  $\frac{1}{2}$ " x 13  $\frac{1}{2}$ " R rectangles for a total of (5) SNF 3  $\frac{1}{2}$ " x 13  $\frac{1}{2}$ " rectangles. Label all as IR.


- 22. Gather all your labeled pieces (A-T, AO, IR, HST A, and HST B) in an organized fashion.
- 23. Using the diagram below, create horizontal rows by sewing your pieces RST according to the labels pictured below. Press. Sew rows RST to create Anchor block. Resulting Anchor block should measure 18" x 18".
- 24. Repeat for a total of (5) 18" x 18" Anchor blocks.

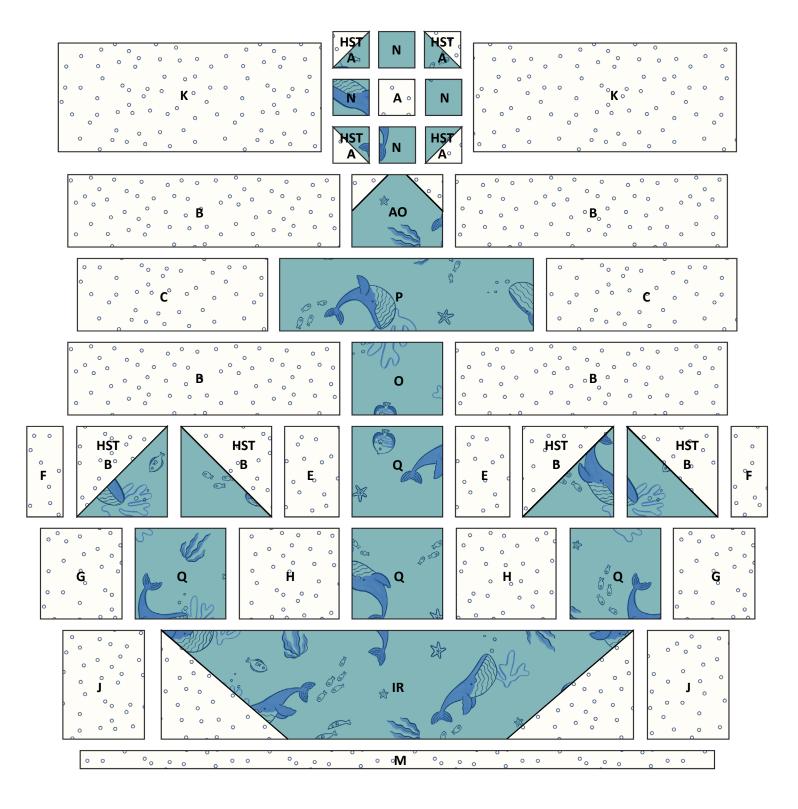


- 25. Lay out blocks using the diagram below, alternating between Anchor blocks and Panel blocks.
- 26. Sew blocks RST to form rows. Press. Next, sew rows RST to create a quilt top that measures 53" x 53". Press.




- 27. Gather (2)  $1^{1}/_{2}$ " X WOF Sea Foam Waves strips and (2)  $1 \frac{1}{2}$ " x  $11 \frac{1}{2}$ " Sea Foam Waves strips.
- 28. With RST sew (1) 1 ½" x WOF strip and (1) 1 ½" x 11 ½" strips together along 1 ½" side as shown in the diagram below. Press. Strip should measure 1 ½" x 53". Repeat with remaining 1½" x WOF strip and 1 ½" x 11 ½" strip for a total of (2) 1 ½" x 53" strips. These are the Top and Bottom Borders.



- 29. Gather (2) 1 ½" X WOF Sea Foam Waves strips and (2) 1 ½" x 13 ½" Sea Foam Waves strips.
- 30. With RST sew (1) 1 ½" x WOF strip and (1) 1 ½" x 13 ½" strip together along 1 ½" side as shown in the diagram below. Press. Strip should measure 1 ½" x 55". Repeat with remaining 1 ½" x WOF strip and 1 ½" x 13 ½" strip for a total of (2) 1 ½" x 55" strips. These are the Side Borders.




31. With RST sew Top and Bottom Borders to the top and bottom of the quilt top. Press. Next, sew Side Borders to the left and right sides of the quilt top. Press. Quilt should measure 55" x 55".

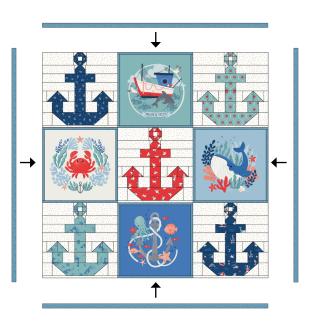

- 32. Gather (2) 5" x WOF Navy Set Sail strips and (2) 5" x 13 1/2" Navy Set Sail strips.
- 33. With RST sew (1) 5" x WOF strip and (1) 5" x 13 ½" strips together along 5" side as shown in the diagram below. Press. Strip should measure 5" x 55". Repeat with remaining 5" x WOF strip and 5" x 13 ½" strip for a total of (2) 5" x 55" strips. These are the Side Borders.



- 34. Gather (2) 5" X WOF Navy Set Sail strips and (2) 5" x 22 1/2" Navy Set Sail strips.
- 35. With RST sew (1) 5" x WOF strip and (1) 5" x 22 ½" strip together along 5" side as shown in the diagram below.
  Press. Strip should measure 5" x 64". Repeat with remaining 5" x WOF strip and 5" x 22 ½" strip for a total of (2) 5" x 64" strips. These are the Top and Bottom Borders.

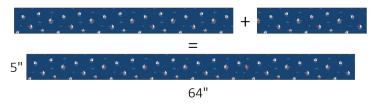

36. With RST sew Side Borders to the left and right sides of the quilt top. Press. Next, sew Top and Bottom Borders to the top and bottom of the quilt top. Press. Quilt should measure 64" x 64".



37. Layer the backing, batting, and quilt top. Quilt as desired. Bind with (7) 2 1/2" x WOF Sea Foam Waves strips. Have fun and enjoy the journey of making your quilt! Share your quilt using the hashtags #lostatseafabric #youmeandtheseaquilt #rileyblakedesigns and #iloverileyblake.

