MAYWOOD STUDIO HARVEST ROSE RUNNER



Harvest Rose Runner Featuring the Harvest Rose Flannel collection from Maywood Studio.

22" x 48"

maywoodstudio.com





Fabric 1 10319-B



Fabric 5 10321-WB










Fabric 3

Fabric 7 10313-WS



Fabric 4 10320-B



MAYWOOD STUDIO

Maywood Studio makes every effort to make sure our patterns are accurate. Check for updates at maywoodstudio.com/projects

Fabric Requirements

	yardage
Fabric 1 *includes binding	1/2 yard
Fabric 2	1/4 yard
Fabric 3	1/8 yard
Fabric 4	1/4 yard
Fabric 5	5/8 yard
Fabric 6	1/8 yard
Fabric 7	Fat Quarter
Backing	1-1/2 yards

Cutting

Fabric 1

Cut (2) 2-5/8" x WOF strips Cut (4) 2-1/2" x WOF strips for binding

Fabric 2 Cut (2) 2-5/8" x WOF strips

Fabric 3 Cut (1) 3" x WOF strip

Fabric 4 Cut (2) 3" x WOF strips

Fabric 5

Cut (1) 3" x WOF strip

Cut (3) 3-1/2" x WOF strips From 2 strips cut: (2) 22-1/2" x 3-1/2" Top/Bottom borders From the remaining cut (4) 3-1/2" squares (8) 3-1/2" x 6-1/2" rectangles

Cut (2) 2-1/2" x WOF strips. Sew together. Cut into: Cut (2) 2-1/2" x 42-1/2" Side borders

Fabric 6

Cut (1) 3-1/2 " x WOF strip into (4) 3-1/2" squares (4) 3-1/2" x 6-1/2" rectangles

Fabric 7

Cut (3) 6-1/2" x 6-1/2" squares

WOF - Width of Fabric LOF - Length of Fabric RST - Right Sides Together HST - Half Square Triangle

Harvest Rose Runner Instructions

Please read all instructions before you begin. Seam allowance is 1/4. Fabric is abbreviated as 'F' - for example, F1 refers to Fabric 1. Use a light sizing/starch to control stretching along the bias edges Press in the direction of arrows.

Four-Patch Units

1. Sew an (F1) 2-5/8" strip to an (F2) 2-5/8" strip, making sure that Fabric 1 is on the left side of the seam. Press toward Fabric 1.

2. Sew an (F1) 2-5/8" strip to an (F2) 2-5/8" strip, making sure that F1 is on the right side of the seam. Press toward F1.

3. Place the strip sets right sides together (RST), making sure to nest the seams. Cut these strips into 10 sets that are 2-5/8" wide. Keep them in the pairs.

4. Sew the pairs together to create your four-patch centers. Make 10. Press open.




Step 1



Step 2









Step 4 Make 10

Four-Patch Hourglass Blocks


1. Block 1: Take a 3" F3 strip and a 3" F4 strip and place RST. Sew 1/4" from the edge along the top and bottom of the long sides. Set the seams with your iron.

2. Cut your paired strips into (12) 3" squares. Make 2 piles, each with 6 squares.

3. Cut one set of 6 squares on the diagonal bottom right to top left. Cut the other set of 6 squares on the diagonal top right to bottom left. Press all your triangle pairs to the right.

4. Block 2: Repeat steps 1-3 using the 3" F4 and F5 strips. Cut into (8) 3" units.

5. Take one four-patch unit and sew 4 sets of triangle pairs, following the diagrams below: Make 8 with F3/F4 and F4/F5 triangles Make 2 with only the F4/F5 triangles

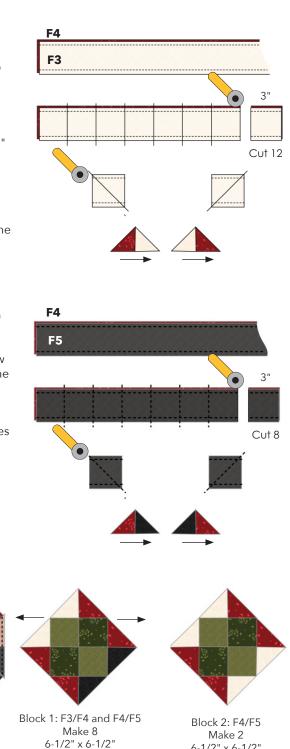

6-1/2" x 6-1/2"

Corner and Side Units

1. Corner Units: Sew an (F5) 3-1/2" square to a (F6) 3-1/2" square. Press toward F5. Make 4.

2. Sew step 1 pairs to the (F5) 3-1/2" x 6-1/2" rectangles, paying attention to the orientation. Make 2 corner units with the F5 squares to the left and 2 with the F5 squares to the right.

3. Side Units: Sew the remaining F5 rectangles to the F6 rectangles. Make 4.



Make 4 3 -1/2" x 6-1/2"





Make 2 Right Corner Units 6 -1/2" x 6-1/2"



Make 4 6 -1/2" x 6-1/2"

Top Assembly

- 1. Lay out the blocks as shown below. For Row 2 you will need the F7 squares.
- 2. Sew blocks into the rows. Press to nest seams.
- 3. Sew rows together. See illustration on p. 7. Press in one direction.
- 4. Sew the side borders. Press toward the borders.
- 5. Sew the top and bottom borders *See tips on p.7. Press toward the borders.



Row 1: Make 2 Left Corner Block 1 Right Unit



Row 2: Make 3 Block 1 F7 square Block 2



Row 3: Make 2 Side Unit Block 2 Side Unit

Border tip: Pin the side borders to the runner top starting at the side center and then place another pin matching the end of the border to outside edges. Then pin inbetween to secure the border in place and keep it from stretching as you sew. Repeat this for the top and bottom borders.




Finishing

1. Layer the backing (wrong side up), batting and quilt top (right side up). Baste layers to secure. Quilt as desired. Trim the excess backing and batting.

2. Sew the binding strips together into one continuous strip. Press in half length-wise. Sew the binding to the quilt top with a 1/4" seam allowance. Turn the binding to the back side of the quilt and stitch down by hand with matching thread.

Runner Planning Diagram

Use this diagram to plan your quilt top.

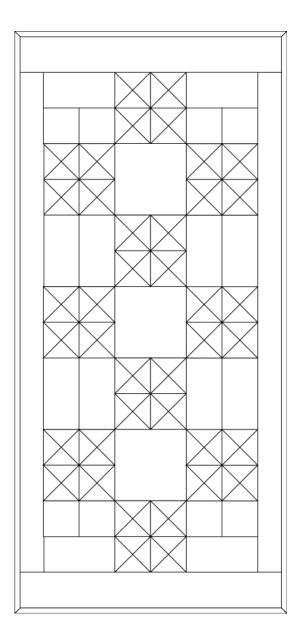

Find more projects and inspiration at maywoodstudio.com