



THROUGH
THE
FOREST LIGHT

Wall Hanging



Featuring the
Through the Forest
Light Collection
by Abraham Hunter
Shipping to stores July 2023

Finished Size: 48 ½ in x 64 ½ in (123.19 cm x 163.83 cm)

Fabric Needed

3 Wishes® Through the Forest Light Collection

- ¾ yd – Country Whitetails Panel (20731-PNL-CTN-D)
- 1 yd – Morning Run (20727-MLT-CTN-D)
- 1 ¾ yd – Rustling Foliage (20726-MLT-CTN-D) includes Binding
- ¾ yd – Hanging Out (20724 -MLT-CTN-D)
- 1 ¾ yd – Solid Black Cotton
- 3 ¼ yds – Morning Run (20727-MLT-CTN-D) for Backing

Additional Supplies Needed:

- 56 in x 72 in (142.24 cm x 182.88 cm) Cotton batting
- Piecing and sewing thread
- Quilting and sewing supplies
- Even-feed foot (optional for quilting)



Morning Run – 1 yd x wof (91.44 cm x 106.68 cm)
 Fussy Cut 12 – 8 1/2 in x 8 1/2 in (21.59 cm x 21.59 cm)



Hanging Out (20724-MLT-CTN-D) – 2/3 yd x wof (60.96 cm x 106.68 cm)
 Cut 3 – 6 1/2 in x 42 in (16.51 cm x 106.68 cm)

Sewing

1. Refer to Diagram A to sew three Solid Black strips 1 1/2 in x 42 in (3.81 cm x 106.68 cm) end to end RST with diagonal seams; trim seam allowance to 1/4 in (6.35 mm). From the sewn strip, cut two strips 1 1/2 in x 43 in (3.81 cm x 109.22 cm).


Dia. A



2. Refer to Diagram B to sew one Solid Black strip 1 1/2 in x 21 in (3.81 cm x 53.34 cm) RST to each side of the Country Whitetails Panel 41 in x 21 in (104.14 cm x 53.34 cm). Sew one Solid Black strip 1 1/2 in x 43 in (3.81 cm x 109.22 cm) RST to the top and bottom of the Country Whitetails Panel to make Unit 1 which should measure 43 in x 23 in (109.22 cm x 58.42 cm); press.

Dia. B

Unit 1

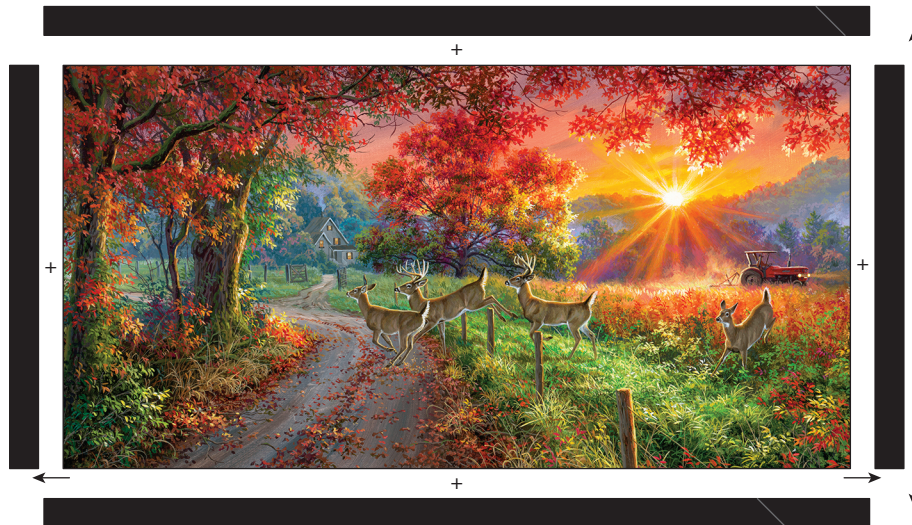

43 in x 23 in (109.22 cm x 58.42 cm)


3. Refer to Diagram C to sew one Rustling Foliage strip $3\frac{1}{4}$ in x 23 in (8.26 cm x 58.42 cm) RST to each side of Unit 1. Sew three Rustling Foliage strips 4 in x 42 in (10.16 cm x 106.68 cm) end to end RST with diagonal seams; trim seam allowance to $\frac{1}{4}$ in (6.35 mm). From the sewn strip, cut two strips 4 in x 43 in (10.16 cm x 109.22 cm). Sew one Rustling Foliage strip 4 in x 43 in (10.16 cm x 109.22 cm) RST to the top and bottom of Unit 1 to make Unit 2 which should measure $48\frac{1}{2}$ in x 30 in (123.19 cm x 76.2 cm); press.



4. Refer to Diagram D and place one Solid Black square $4\frac{1}{2}$ in x $4\frac{1}{2}$ in (11.43 cm x 11.43 cm) RST on the top left corner of one Morning square $8\frac{1}{2}$ in x $8\frac{1}{2}$ in (21.59 cm x 21.59 cm). **Note:** Check the orientation of design. Sew across the diagonal of the Solid Black square from the upper right corner to the lower left corner. Refer to Diagram E to flip open the triangle formed and press. Trim away the excess fabric from behind the triangle $\frac{1}{4}$ in (6.35 mm). Refer to Diagram F for seam direction to add a Solid Black square $4\frac{1}{2}$ in x $4\frac{1}{2}$ in (11.43 cm x 11.43 cm) RST to each of the remaining corners of the Morning Run square; press to make Unit 3. Unit 3 should measure $8\frac{1}{2}$ in x $8\frac{1}{2}$ in (21.59 cm x 21.59 cm). Repeat to make twelve of Unit 3 (Diagram G).



5. Refer to Diagram H to sew six Unit 3's RST; press to make Unit 4. Unit 4 should measure $48\frac{1}{2}$ in x $8\frac{1}{2}$ in (123.19 cm x 21.59 cm). Repeat to make two.
6. Refer to Diagram I to sew one Unit 4 to the top and bottom of Unit 2 to make Unit 5 which should measure $48\frac{1}{2}$ in x 46 in

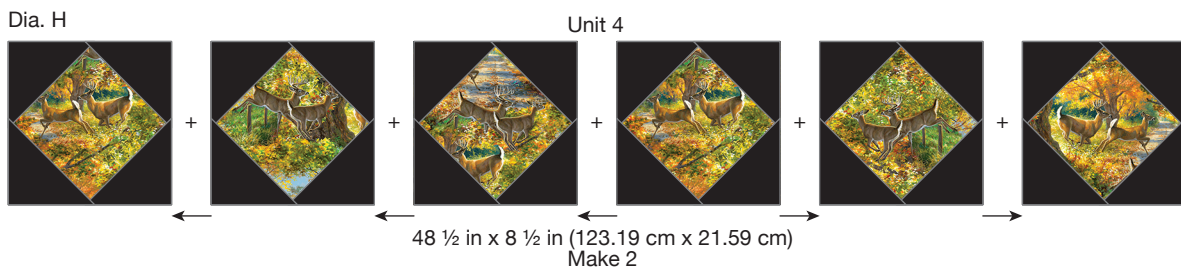


(123.19 cm x 116.84 cm); press.

Unit 5



7. Sew three Rustling Foliage Palms strips $2\frac{1}{2}$ in x 42 in (6.35 cm x 106.68 cm) end to end RST with diagonal seams; trim seam allowance to $\frac{1}{4}$ in (6.35 mm). From the sewn strip, cut two strips $2\frac{1}{2}$ in x $48\frac{1}{2}$ in (6.35 cm x 123.19 cm). Refer to Diagram J to sew one Rustling Foliage strip $2\frac{1}{2}$ in x $48\frac{1}{2}$ in (6.35 cm x 123.19 cm) RST to the top and bottom of Unit 5 to make Unit 6 which should measure $48\frac{1}{2}$ in x 50 in (123.19 cm x 127 cm); press.

8. Sew three Solid Black strips $1\frac{1}{2}$ in x 42 in (3.81 cm x 106.68 cm) end to end RST with diagonal seams; trim seam allowance to Unit 6

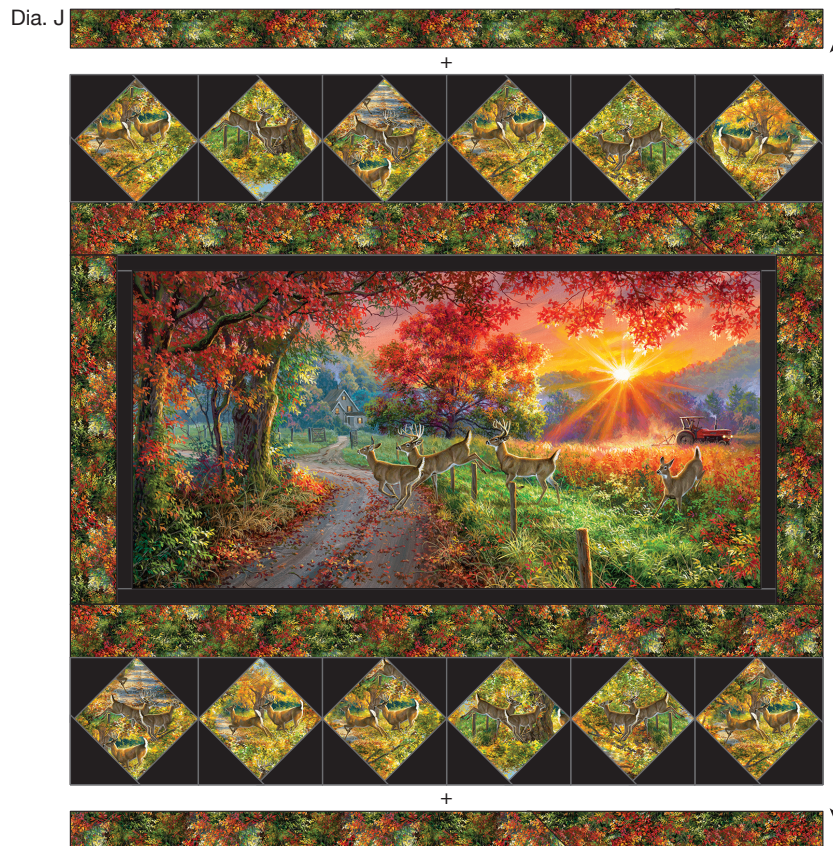

$48\frac{1}{2}$ in x 50 in (123.19 cm x 127 cm)

$\frac{1}{4}$ in (6.35 mm). From the sewn strip, cut two strips $1\frac{1}{2}$ in x $48\frac{1}{2}$ in (3.81 cm x 123.19 cm). Refer to Diagram K to sew one Solid Black strip $1\frac{1}{2}$ in x $48\frac{1}{2}$ in (3.81 cm x 123.19 cm) RST to the top and bottom of Unit 6 to make Unit 7 which should measure $48\frac{1}{2}$ in x $52\frac{1}{2}$ in (123.19 cm x 133.35 cm); press.

- Sew three Hanging Out strips $6\frac{1}{2}$ in x 42 in (16.51 cm x 106.68 cm) end to end RST with diagonal seams; trim seam allowance to



¼ in (6.35 mm). From the sewn strip, cut two strips 6 ½ in x 48 ½ in (16.51 cm x 123.19 cm). Refer to Diagram L to sew one Hanging Out strip 6 ½ in x 48 ½ in (16.51 cm x 123.19 cm) RST to the top and bottom of Unit 7 to make the Quilt Top which should measure 48 ½ in x 64 ½ in (123.19 cm x 163.83 cm); press.

10. To make the Morning Run Backing, remove the selvages and cut two pieces 42 in x 56 in (106.68 cm x 142.24 cm). Pin and sew the Quilt Top

Dia. L



rectangles RST along the long edges as shown in Diagram M. Trim the Back to measure 56 in x 72 in (142.24 cm x 182.88 cm).

13. Press finished Quilt Top and Backing fabric. Tape the Backing **wrong** side up on a firm surface. Layer Batting and Quilt Top (right

Dia. M




Trim to measure 56 in x 72 in (142.24 cm x 182.88 cm)

side up). Baste the layers together with safety pins. Quilt as desired.

14. Once the quilting is complete, square up corners and edges, trimming excess Backing and Batting even with the Quilt Top.

15. To make the Rustling Foliage Binding, remove the selvages and sew the short ends of the six 2 ½ in x 42 in (6.35 cm x 106.68 cm) strips RST end to end at a 45 degree angle to make one continuous strip; press seams open. Press one short end ¼ in (6.35 mm) to the **wrong** side. Fold in half lengthwise with **wrong** sides together; press. Leaving a 2 in (5.08 cm) tail on the folded end, place cut edges of folded Binding even with the edge of the Wall Hanging and sew, mitering the corners (Dia. N). Overlap ends, trim any excess and finish sewing the Binding. Fold the Binding over to the back and hand stitch.

Dia. N

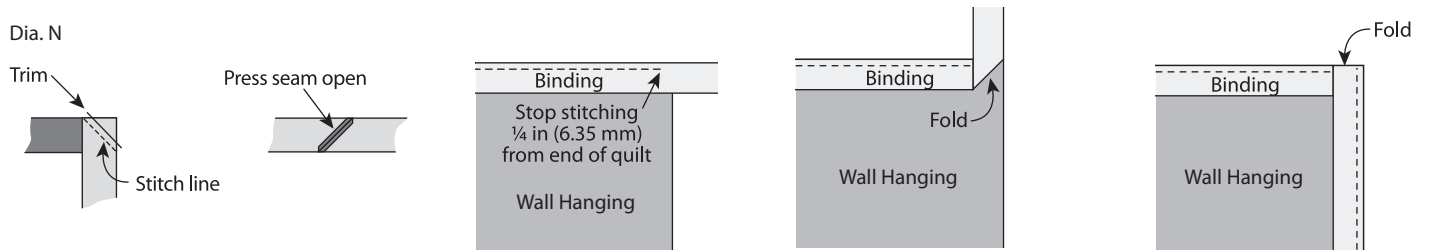

Finished Care Instructions

Machine wash in cold water; gentle cycle. Do not bleach. **Tip:** Before drying, check for fabric dyes that may have run. If fabric dyes run, rewash and rinse using a color catcher to absorb loose dye. Lay flat to dry or tumble dry low.